



# Energy Saving LED Range LED Strip Light SA10120

## Package Contents

1. 1 x LED rigid strip
2. 2 x Strip mounting clips
3. 2 x Screws
4. Fixture instructions



Driver connection lead required for each series (not included)

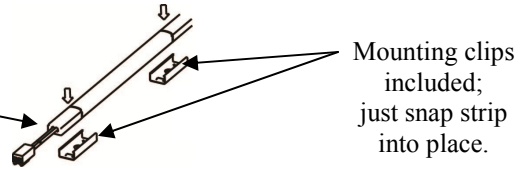

## Important Safety Information

Please read these instructions carefully before attempting to install this product. It is advisable to keep these instructions in a safe place for further reference. **We recommend that you consult a qualified electrician.** These products must not be modified; if any modifications are made, it may invalidate the warranty and may render the product unsafe. These LED lights operate on low voltage (12V DC). **Do not wire the individual LED light fixtures directly to line power. This product is for indoor use only. Keep out of moisture and use only in dry rooms.**

**CAUTION :** To reduce the risk of fire, electric shock, or injury to persons:

- a) Use only insulated staples or plastic ties to secure cords;
- b) Route and secure cords so that they will not be pinched or damaged when the cabinet is pushed to the wall;
- c) Position the light with respect to the cabinet so the lamp replacement markings are able to read during re-lamping;
- d) Not intended for recessed installation in ceilings, or soffits.

The low voltage light may be installed under a kitchen cabinet or other built-in furniture when:

- 1) The low voltage Class 2 power supply is located outside the cabinet and is not concealed; and
- 2) The line voltage power supply cord is not concealed or run through openings in the cabinet, walls, ceilings, or floors. This requirement does not apply to the wiring between the cabinet light and the power unit.

The National Electrical Code (NEC) does not permit cords to be concealed where damage to insulation may go unnoticed. To prevent fire danger, do not run cord behind walls, ceilings, soffits, or cabinets where it may be inaccessible for examination. Cords should be visually examined periodically and immediately replaced when any damage is noted.

## Safety Instructions

1. Before commencing installation or maintenance, turn off the main electrical supply for the appropriate circuit at the fuse board.
2. This product is only suitable for connecting to a 12V DC power source. The light should be mounted onto a secure surface. Position lights where they will not be exposed to steam, splashes, etc.
3. Never exceed the total output of your LED driver.
4. Suitable for cabinet and decorative lighting.
5. When the lamp expires the fixture must be replaced.
6. Class 2 safety extra low voltage (SELV).
7. Be sure to use only approved accessories and drivers.
8. Ensure that the screw heads securing the mounting clips are in the clip recessed pit.

### Accessories:

- SA10122 - LED Corner Strip Wire - 1.18" (30mm)
- SA10123 - LED Connection Cable - 11.81" (300mm)
- SA10124 - LED Strip Driver Connection Lead 8.2' (2.5m)
- SA10125 - LED Rigid Strip End Caps

### Drivers:

- SA40525 - Sensio 110V LED 6W 12V Driver with 4 Port ML Block
- SA40526 - Sensio 120V LED 30W 12V Driver with 12 Port ML Block

### Options:

Available in Red, Green, Blue, Cool White, or Warm White

Wattage	0.8W
Voltage	12V DC
LED Qty	12
Lamp Type	LED
Kelvin (Cool / Warm)	5000/3200K
LPW	20lm
Beam Angle	120°
Lifespan	50000 Hours
Materials	Clear Plastic
Width	0.31in (8mm)
Depth	0.24in (6mm)
Length	11.81in (300mm)

