




## SASH CHAIN

WORKING LOAD LIMIT: 75 TO 225 LBS.

Sash chain is typically used in pulley applications in windows and window sashes.

### BENEFITS & FEATURES

- Not for overhead lifting
- Meets or exceeds ASTM & NACM standards where applicable
- Zinc-plated finish
- Custom cuts for OEM applications are available
- Design factor 4:1



Trade Size	Working Load Limit (lbs.)	Product Code	Quantity per Carton (ft.)	Weight per Carton (lbs.)	Nominal Chain Dimensions (in.)		Weight (lbs./ft.)	Approximate Number of Links (per ft.)
					Stock Thickness A	B		
8	75	683451	100	3.9	0.04	0.55	0.04	21.82
25	94	683452	100	4.9	0.04	0.55	0.05	21.82
30	81	683453	100	5.5	0.03	0.56	0.06	21.43
35	106	683454	100	5.9	0.04	0.56	0.06	21.43
40	131	683456	100	8.0	0.04	0.56	0.08	21.43
45	175	683457	100	9.5	0.05	0.56	0.10	21.43
50	225	683458	100	12.0	0.06	0.59	0.12	20.34


## BUOY CHAIN

WORKING LOAD LIMIT: 15,000 TO 91,000 LBS.

For use on navigation markers for the U.S. Coast Guard, Public Works Canada and other navigation jurisdictions.

### BENEFITS & FEATURES

- Not for overhead lifting
- Design factor 4:1

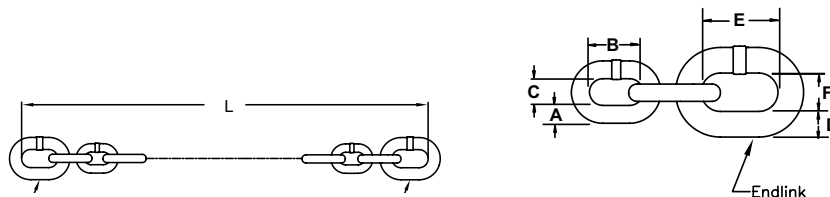

Chain Size (in.)	Working Load Limit (lbs.)	Product Code	L (in.)	Chain Dimensions (in.)			Endlink Dimensions (in.)			Finish	Weight (lbs./shot)
				A	B	C	D	E	F		
1/2	15,000	6510049	90	0.50	3.00	1.88	0.75	4.50	2.69	Self Colored	196.00
1/2	15,000	6510048	45	0.50	3.00	1.88	0.75	4.50	2.69	Self Colored	99.26
3/4	32,000	6510050	90	0.75	4.50	2.69	0.88	5.25	3.13	Self Colored	431.66
3/4	32,000	6510051	45	0.75	4.50	2.69	0.88	5.25	3.13	Self Colored	215.66
1	58,000	4340890	90	1.00	6.00	3.56	1.00	6.00	3.56	Self Colored	760.50
1	58,000	4340890G	90	1.00	6.00	3.56	1.00	6.00	3.56	Hot Dipped Galvanized	760.50
1-1/8	77,000	4340990	90	1.13	6.75	4.00	1.13	6.75	4.00	Self Colored	961.20
1-1/4	91,000	4341090	90	1.25	7.50	4.44	1.25	7.50	4.44	Self Colored	1,186.20