

## CABLE & COMPONENTS



### Galvanized and Stainless Steel Cable


7 x 7	Cable Diameter (in.)	Wt./Reel (lbs.)	Standard Length (ft./Reel)	Nominal Break Strength (lbs.)	
				Galvanized Cable (GAC)	Stainless Steel Cable (SSAC) Type 304
	1/16	5	500	480	480
	3/32	9	500	920	920
	1/8	15	500	1,700	1,760

7 x 19	3/32	9	500	1,000	920
	1/8	15	500	2,000	1,760
	5/32	12	250	2,800	2,400
	3/16	17	250	4,200	3,700
	1/4	25	250	7,000	6,400
	5/16	38	200	9,800	9,000
	3/8	52	200	14,400	12,000


### Galvanized Cable Coated with Clear Vinyl

Galvanized Cable Construction	Cable Diameter (in.)	Coated To: (in.)	Wt./Reel (lbs.)	Standard Length (ft./Reel)	Nominal Break Strength (lbs.)
7 x 7	1/16	3/32	7	500	480
	3/32	3/16	7	250	920
	1/8	3/16	10	250	1,700
7 x 19	1/8	3/16	10	250	2,000
	3/16	1/4	19	200	4,200
	1/4	5/16	28	200	7,000

### Heavy Duty Wire Rope Thimbles

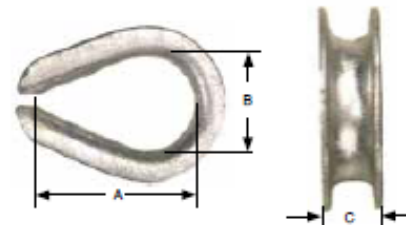

### Standard Wire Rope Thimbles

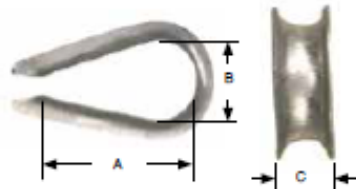

Rope Dia. (in.)	Dimensions (in.)			Quantity Per Bag	Weight Per Bag (lbs.)
	A	B	C		
1/8	1 5/16	11/16	1/4	100	4
3/16	1 5/16	11/16	5/16	100	4
1/4	1 5/16	11/16	3/8	100	4
5/16	1 1/2	13/16	7/16	80	3
3/8	1 5/8	15/16	1/2	80	4

Rope Dia. (in.)	Dimensions (in.)			Weight Per 100 Pieces (lbs.)
	A	B	C	
1/4	1 5/8	7/8	7/16	8
5/16	1 7/8	1 1/16	17/32	14
3/8	2 1/8	1 1/8	21/32	22
7/16	2 5/16	1 1/4	3/4	36
1/2	2 3/4	1 1/2	15/16	51
5/8	3 1/4	1 3/4	1 1/32	75
3/4	3 3/4	2	1 1/4	147
7/8	4 1/4	2 1/4	1 7/16	185
1	4 1/2	2 1/2	1 11/16	300
1 1/8	5 1/8	2 7/8	1 13/16	400
1 1/4	6 1/2	3 1/2	2 3/16	817
1 3/8 - 1 1/2	6 1/4	3 1/2	2 9/16	1,175
1 5/8	8	4	2 23/32	1,700
1 3/4	9	4 1/2	2 27/32	1,775
1 7/8 - 2	12	6	3 3/32	2,500
2 1/4	14	7	3 5/8	3,950