

# POLIFAN® Flap Discs

## Flat (Type 27) and Conical (Type 29) – Performance Line SG




Continued from last page.

Diameter (D) [Inches]	Thickness Nominal (T) [Inches]	Thickness Metric (T) [mm]	Grit	Unthreaded Arbor Hole			Threaded Arbor Hole			Max. RPM
				Bore (H) [Inches]	EDP Number		Thread	EDP Number		
4	9/16	14	120	5/8	62357	10	3/8-24	62449	10	15,300
4-1/2	3/4	18	40	7/8	62361	10	5/8-11	62373	10	13,300
4-1/2	5/8	17	60	7/8	62362	10	5/8-11	62374	10	13,300
4-1/2	5/8	17	80	7/8	62363	10	5/8-11	62375	10	13,300
4-1/2	9/16	14	120	7/8	62364	10	5/8-11	62376	10	13,300
5	3/4	18	40	7/8	62365	10	5/8-11	62377	10	12,200
5	5/8	17	60	7/8	62366	10	5/8-11	62378	10	12,200
5	5/8	17	80	7/8	62367	10	5/8-11	62379	10	12,200
7	3/4	18	40	7/8	62369	10	5/8-11	62381	10	8,600
7	5/8	17	60	7/8	62370	10	5/8-11	62382	10	8,600
7	5/8	17	80	7/8	62371	10	5/8-11	62383	10	8,600
7	5/8	16	120	7/8	62372	10	5/8-11	62384	10	8,600

Conical (PFC - Type 29)

4-1/2	5/8	15	40	7/8	62231	10	5/8-11	62241	10	13,300
4-1/2	9/16	14	60	7/8	62232	10	5/8-11	62242	10	13,300
4-1/2	9/16	14	80	7/8	62233	10	5/8-11	62243	10	13,300
4-1/2	9/16	14	120	7/8	62234	10	5/8-11	62244	10	13,300
5	5/8	17	40	7/8	62235	10	5/8-11	62244	10	12,200
5	5/8	16	60	7/8	62236	10	5/8-11	62245	10	12,200
5	5/8	16	80	7/8	62237	10	5/8-11	62246	10	12,200
7	5/8	17	40	7/8	62238	10	5/8-11	62247	10	8,600
7	5/8	16	60	7/8	62239	10	5/8-11	62248	10	8,600
7	5/8	16	80	7/8	62240	10	5/8-11	62249	10	8,600

### Stainless Steel (INOX) Type SG ZA

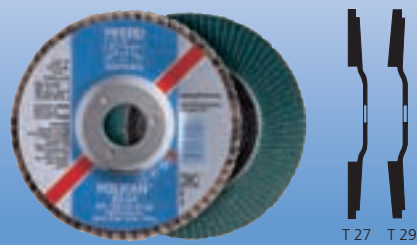

Professional tool for demanding grinding work. PFERD design with high stock removal and tool life.

**Abrasive: Zirconia Alumina/  
Aluminum Oxide ZA**

Grit sizes: 24, 40, 60, 80

**Workpiece Materials**

Stainless steel (INOX)

**Application**

Surface grinding, work on weld seams

**Recommendation for Use**

The high-performance abrasive zirconia alumina retains its good cutting qualities particularly

during surface grinding on stainless steel (INOX) and does not glaze. Recommended for angle grinders of all power output levels.

**PFERD Specification Number**  
SG ZA



Diameter (D) [Inches]	Thickness Nominal (T) [Inches]	Thickness Metric (T) [mm]	Grit	Unthreaded Arbor Hole			Threaded Arbor Hole			Max. RPM
				Bore (H) [Inches]	EDP Number		Thread	EDP Number		
4	5/8	16	40	7/8	60890	10	3/8-24	60920	10	15,300
4	5/8	16	60	7/8	60891	10	3/8-24	60921	10	15,300
4	5/8	16	80	7/8	60892	10	3/8-24	60922	10	15,300
4-1/2	3/4	18	40	7/8	60895	10	5/8-11	60925	10	13,300

Flat (PFF - Type 27)

Continued on next page.