


ADJUSTABLE SELF CLOSING SAFETY GATE



- COTTERMAN ADJUSTABLE SELF CLOSING GATES ASSIST YOUR FACILITY IN MEETING PROTECTION STANDARDS FOR LADDERWAY AND PLATFORM OPENINGS • EASILY INSTALLS TO EXISTING PLATFORM AND STAIR OPENINGS • UNIQUE GATE WIDTH IS AVAILABLE IN TWO ADJUSTABLE SIZE RANGES: 16" TO 26" OR 24" TO 40". GATE WIDTH IS ADJUSTABLE IN 2" INCREMENTS.



TESTED TO OVER 1,000,000 CYCLES WITHOUT SPRING FAILURE OR HINGE DEGRADATION. STAINLESS STEEL SPRING ENSURES GATE CLOSING AUTOMATICALLY WHILE PREVENTING RUST.



ANTI FRICTION BEARINGS PROVIDE SMOOTH OPERATION AND LONG LIFE ELIMINATING METAL TO METAL CONTACT.




PROTECTS PERSONNEL FROM ACCIDENTALLY FALLING THRU OPENINGS

PRODUCT FEATURES

Issue: OSHA requires platform and mezzanine guardrail openings to be protected to prevent employee serious injury or death from accidentally falling.

Application: Any guardrail system with a personnel opening can be protected to OSHA standard with one of the two Cotterman Safety Swing Gates. Cotterman Adjustable Safety Gates meet or exceed OSHA 1910.23.

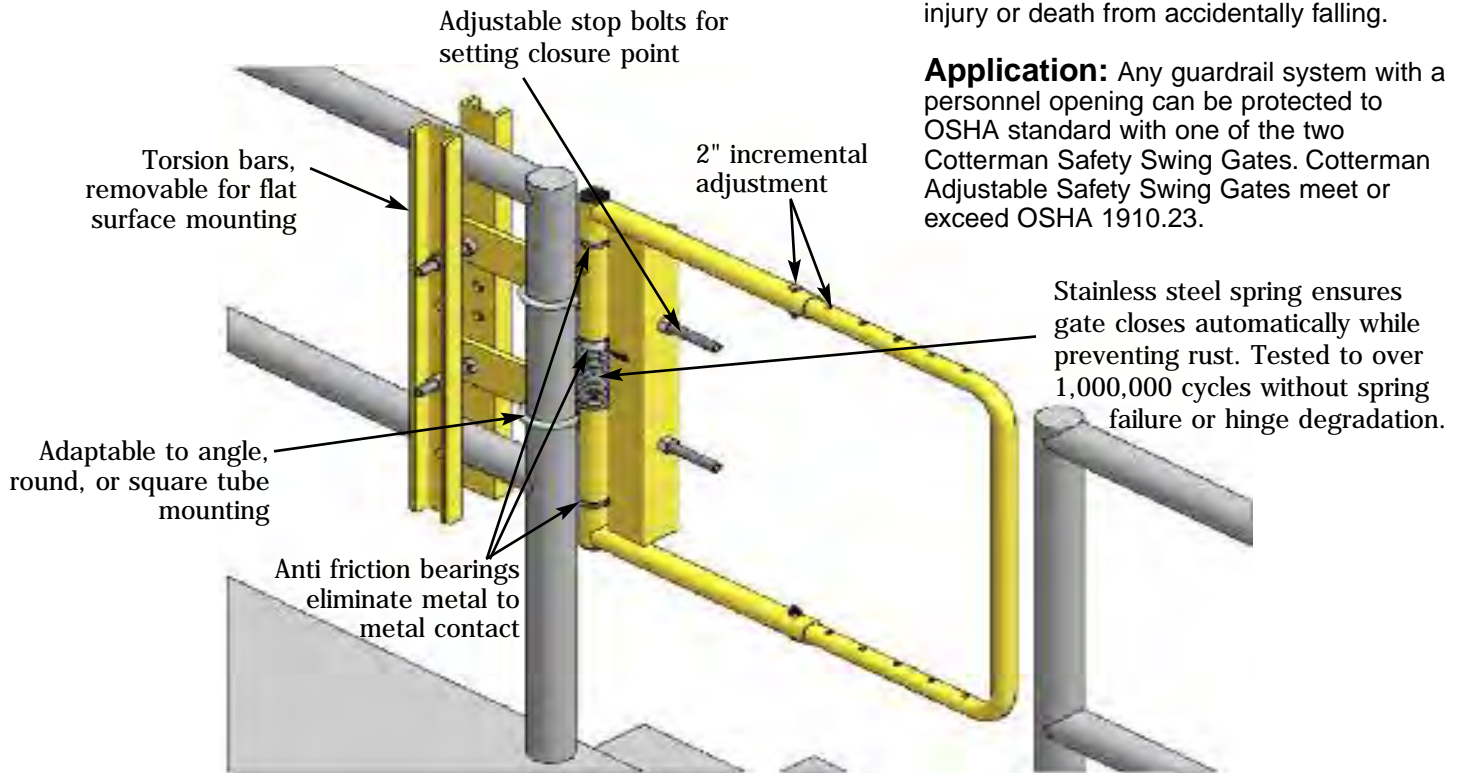

- Versatile, can be mounted to round rail, square rail, angular rail of up to 2", or a firm reinforced wall surface.
- Stainless steel spring closes the gate after each pass thru.
- Adjustment bolts position the gate and provide a stop without contacting the existing rail.
- Unique gate width is available in two adjustable size ranges: to fit openings of 16" to 26" or 24" to 40". Gate width is adjustable in 2" increments.
- Available in safety yellow or gray powder coated finish with zinc rich powder coat primer for corrosion resistance, or stainless steel construction.

MODEL	ADJ. RANGE	FINISH
AG1626ZC2	16" to 26"	safety yellow powder top coat*
AG2440ZC2	24" to 40"	safety yellow powder top coat*
AG1626ZC1	16" to 26"	gray powder top coat*
AG2440ZC1	24" to 40"	gray powder top coat*
AG1626S	16" to 26"	stainless steel
AG1440S	24" to 40"	stainless steel

*zinc rich powder-coat primer

Cotterman Co.

Div. of Material Control, Inc.



"CHARGE IT"

WARRANTY

All Cotterman products are guaranteed against defects in workmanship and materials for a period of one (1) year after shipment.

COPYRIGHT COTTERMAN CO. 2001

COTTERMAN COMPANY IS PROUD TO BE A MEMBER OF THE FOLLOWING ASSOCIATIONS:



MEMBER
NATIONAL
INDUSTRY
ASSOCIATION



MEMBER
ANSI

