

Dynabrade Product Spotlight

Dynabrade Loop-Face Sanding Pads

2" and 3" Dia. Loop-Face Pads

For use with Dynabrade Dynafine® and Wet Dynafine®. Pads accept 3M Trizact™ and Hookit™ II Abrasives.

- Non-vacuum, 3/8" thick, medium density.
- Ideal for spot repair and removal of dust nibs on clearcoat and gelcoat paint systems.
- Pads are sold separately.

58025


2" (51 mm) Dia.

58026

3" (76 mm) Dia.



57902 Wet Dynafine®

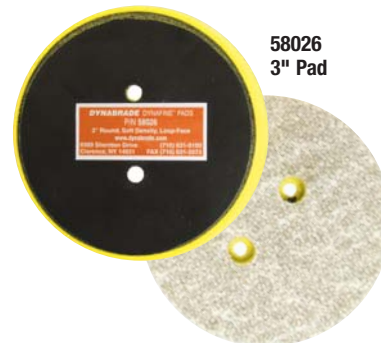

58026
3" Pad

5" and 6" Dia. Loop-Face Pads

For use with Dynabrade Random Orbital Sanders. Pads accept 3M Trizact™ and Hookit™ II Abrasives.

- 3/8" thick, medium density.
- Pads are sold separately.

Non-Vacuum Pads

56310

5" (127 mm) Dia.

56312

6" (152 mm) Dia.

Vacuum Pads

56311

5" (127 mm) Dia.

56313

6" (152 mm) Dia.



56310
5" Pad



59020 Dynorbital-Spirit®



56826 Dynorbital® Supreme

3M, Trizact and Hookit II are registered trademarks of 3M Company.

Vacuum Pads for Mesh-Style Abrasives

5", 6" and 11" Diameter – for use with Dynabrade Random Orbital Sanders.

- Vacuum sanding pads accept mesh-style abrasives for improved finish and longer abrasive life.
- 13,000 RPM maximum operating speed. 5/16"-24 male thread, 3/8" thick.

56320


5" (127 mm) Dia.

56321

6" (152 mm) Dia.

53997

11" (279 mm) Dia.

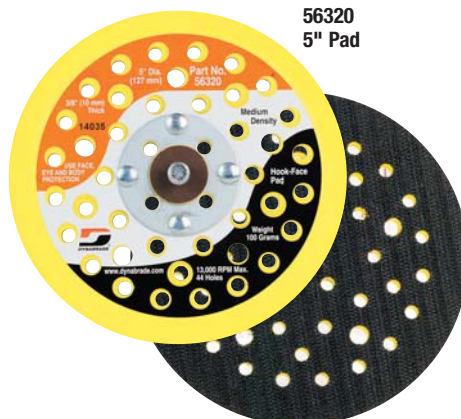

56320
5" Pad



53997
11" Pad