

**CADET™ RIGHT HEIGHT 16-1/2"
PRESSURE-ASSISTED ELONGATED TOILET**

- 2377.100**
 - Vitreous china
 - Low-consumption (1.6 gpf/6.0 Lpf)
 - Bowl rim at 16-1/2"
 - Elongated bowl
 - Pressure-assisted siphon jet flush action
 - Fully-glazed 2" ballpass trapway
 - 10" x 12" water surface area
 - Close-coupled Flushometer tank*
 - Side-mounted chrome trip lever
 - Speed Connect® tank/bowl coupling system
 - Sanitary dam on bowl
 - Two bolt caps
 - 100% factory flush tested
- 3109.016** Bowl with two bolt caps
- 4098.100** Tank complete with coupling components



Nominal Dimensions:

806 x 495 x 800mm
(31-3/4" x 19-1/2" x 31-1/2")

Fixture only, seat and supply by others

Recommended working pressure range
20 psi - 80 psi

Alternate Configurations Available:

- 3109.456** Elongated bowl only with slotted rim for bedpan holding
- 4098.700** Tank and tank cover only with tank cover locking device
- 4098.800** Tank and tank cover only with right hand trip lever
- 4098.900** Tank complete with right hand trip lever and tank cover locking device

Compliance Certifications -


Meets or Exceeds the Following Specifications:

- ASME A112.19.2 for Vitreous China Fixtures

To Be Specified:

- Color: White Bone Linen
 Silver Fawn Beige Black
- Seat: American Standard #5324.019 "Rise and Shine" (with easy to clean lift-off hinge system) solid plastic closed front seat with cover.
- Seat: American Standard #5311.012 "Laurel" molded closed front seat with cover.
- Alternate Seat:
- Supply with Stop:

* Flushmate III tank system by Flushmate® Div. of Sloan Valve Co

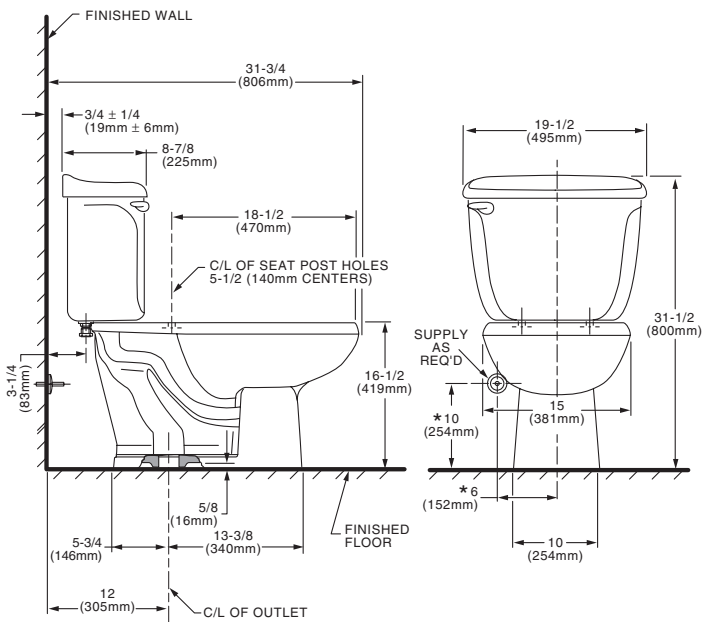

NOTES:

THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305mm (12") FROM FINISHED WALL TO C/L OF OUTLET. SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.
* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USABLE BUILDING FACILITIES - CHECK LOCAL CODES.