

Style That Works Better

# COMPACT CADET<sup>®</sup> 3 RIGHT HEIGHT<sup>™</sup> **ELONGATED ONE-PIECE TOILET** VITREOUS CHINA

## COMPACT CADET<sup>®</sup> 3 RIGHT HEIGHT™ ELONGATED ONE-PIECE TOILET WITH SEAT

## 2403.012

- Vitreous china
- Low-consumption (6.0 Lpf/1.6 gpf)
- Space saving compact design Elongated Right Height bowl fits in the same space as a round front toilet
- EverClean<sup>®</sup> surface inhibits the growth of stain- and odor-causing bacteria, mold, and mildew on the surface
- Featuring the Cadet<sup>®</sup> 3 Flushing System
- One-piece design
- Elongated siphon action jetted bowl with 2-1/8" trapway
- Internal trapway area fully glazed
- Rim height at 419mm (16-1/2") for accessible application
- Includes color-matched and design-matched solid plastic toilet seat and cover with slowclose hinges and EverClean® surface. Seat features unique sanitary seat lift tab
- Oversized 3" Flush Valve with Chemical Resistant Flapper
- 10" x 8" water surface area
- 2 bolt caps
- Chrome Trip Lever
- 100% factory flush tested
- 5 year warranty
- 2403.500 Same as above, except with Aquaguard liner in tank
- 2403.800 Same as above, except with trip lever on right side
- 2403.312 Same as above, less seat

### Nominal Dimensions:

724 x 394 x 724mm (28-1/2" x 15-1/2" x 28-1/2")

Fixture only, supply by others

# **Compliance Certifications -**


- Meets or Exceeds the Following Specifications: • ASME A112.19.2-2008/CSA B45.1-08 for Vitreous
- China Fixtures

# To Be Specified:

- □ Color:
- U White U Bone U Linen U Black
- □ Supply with Stop:



FINISHED WALL

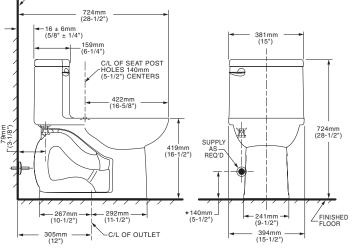

#### NOTES:

THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12") FROM FINISHED WALL TO C/L OF OUTLET. SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY \* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2 These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.



MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USABLE BUILDING FACILITIES-CHECK LOCAL CODES.

