


CERAMIX® PRESSURE BALANCE BATH/SHOWER FITTING



T000.502 Bath/Shower Trim Shown

GENERAL DESCRIPTION:

SHOWERHEAD

Adjustable showerhead at maximum 2.5 gpm/9.5 L/min. flow rate.

WALL TUB SPOUT

Brass slip-on diverter spout.

WALL VALVE TRIM


Available with metal lever handle. Brass wall escutcheon.

MODEL NUMBER:

TRIM KITS*:

- ☐ T000.502 Ceramix BATH/SHOWER Trim Kit Metal Lever Handle. LESS Valve Body.
- ☐ T000.501 Ceramix SHOWER ONLY Trim Kit Metal Lever Handle. LESS Valve Body.
- T000.500 Ceramix VALVE ONLY Trim Kit Metal Lever Handle. LESS Valve Body.

For use with R120 Series Pressure Balance Valves. See reverse side for available Rough Valves.

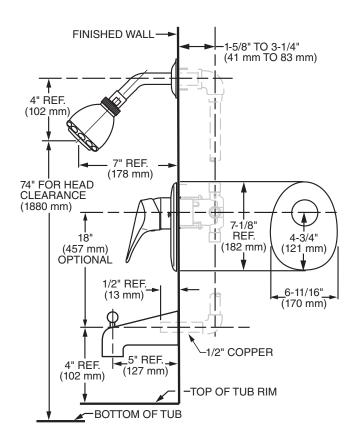

* NOTE: TRIM KITS CANNOT BE USED WITH CERAMIX SPOOL TYPE VALVES.

SUGGESTED SPECIFICATION:

Bath/shower fitting shall feature a cast brass valve body. Fitting shall be: American Standard - Trim Kit Model # T000.50_.__ and Valve Body Model # R12_.




CERAMIX® PRESSURE BALANCE BATH/SHOWER FITTING

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ANSI A 117.1 ASSE 1016 ASME A112.18.1 CSA B 125.1



		* TRIM & ROUGH MUST BE ORDERED SEPARATELY.	Finish Options
∗ SI	Product		Polished Chrome
∀	Number	Description	002
AIM.	T000.502	Bath/Shower Trim Kit. Metal Lever Handle. LESS Valve Body.	
F	T000.501	Shower Only Trim Kit. Metal Lever Handle. LESS Valve Body.	
	T000.500	Valve Only Trim Kit. Metal Lever Handle. LESS Valve Body.	

NOTE: TRIM KITS CANNOT BE USED WITH CERAMIX SPOOL TYPE VALVES.

	Product Number	Description
	R121	Rough Valve Body less trim. Universal inlets/outlets.
ES	R121SS	Rough Valve Body less trim. Universal inlets/outlets with Screwdriver Stops.
₫	R120	Rough Valve Body less trim. Direct Sweat inlets/outlets.
ВО	R120SS	Rough Valve Body less trim. Direct Sweat inlets/outlets with Screwdriver Stops.
Ę	R125	Rough Valve Body less trim. Female Thread inlets/outlets.
4	R125SS	Rough Valve Body less trim. Female Thread inlets/outletswith Screwdriver Stops.
\$	R127	Rough Valve Body less trim. PEX inlets/universal outlets for Crimp Ring PEX system (ASTM F1807).
UGH	R127SS	Rough Valve Body less trim. PEX inlets/universal outlets for Crimp Ring PEX system (ASTM F1807) with Screwdriver Stops.
<u>o</u>	R128	Rough Valve Body less trim. PEX inlets/universal outlets for Cold Expansion PEX system (ASTM F1960).
ш	R128SS	Rough Valve Body less trim. PEX inlets/universal outlets for Cold Expansion PEX system (ASTM F1960) with Screwdriver Stops.
	R129	Rough Valve Body less trim. CPVC inlets/universal outlets.
	R129SS	Rough Valve Body less trim. CPVC inlets/universal outlets with Screwdriver Stops.

Meets the American Disabilities Act Guidelines and ANSI A117.1 Requirements for the physically challenged.

B50