

Features


- Geolux stationary shower screen
- Bottom u-channel & one top glass clamp
- 3/8" (10 mm) thick tempered Clear glass
- Anodized aluminum hardware prevents rusting or corrosion
- Available in two heights and three widths

3/8" Glass Options

- Clear (CL)
- AquaGlideXP Clear (XP)

Finish Options

- Chrome (SV)
- Brushed Nickel (BN)
- Oil Rubbed Bronze (OR)

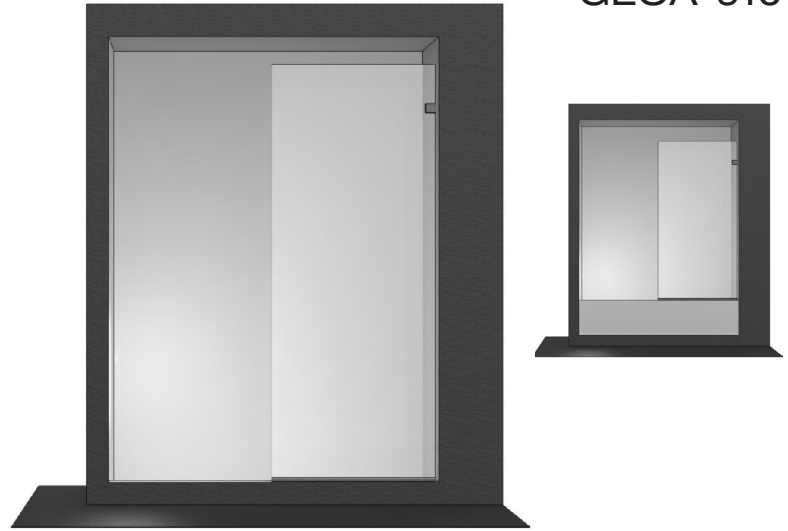


Applicable Codes/Standards

Specified model meets or exceeds the following:

- ASTM C1464-06 and ASTM C1048
- Safety criteria CPSC16 CRF 1201 categories 1 & 2 and ANSI Z97.1
- SGCC Certification required.

Installation Notes

Install this product according to the installation guide.

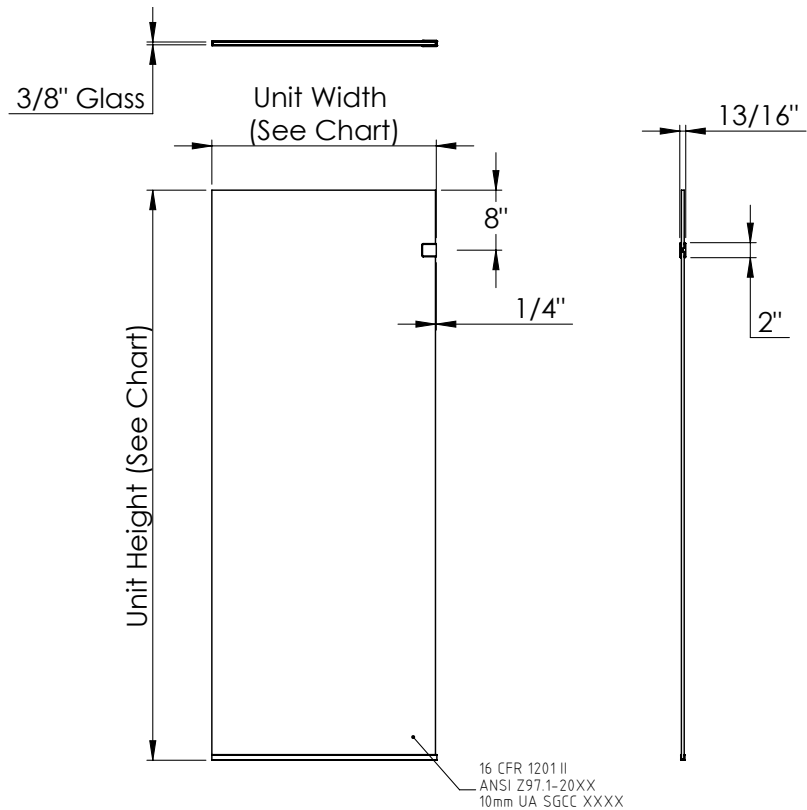

| GLASS SIZING CHART | | | |
|--------------------|---------------|-----------|-----------------------------------|
| Unit Height | Opening Width | Unit Size | Panel Size (in)/Weight (lbs) |
| 60" For Tub | 60" | 30" X 60" | 29 3/4" X 59 13/16" - (63.02 lbs) |
| | 48" | 24" X 76" | 23 3/4" X 75 13/16" - (63.77 lbs) |
| 76" For Shower | 60" | 30" X 76" | 29 3/4" X 75 13/16" - (79.88 lbs) |
| | 72" | 36" X 76" | 35 3/4" X 75 13/16" - (95.99 lbs) |