

## BOOTZCAST PORCELAIN ENAMEL 60" X 30" X 14 1/4" BATHTUB



011-7200 RH DRAIN, SLIP-RESISTANT  
011-7201 LH DRAIN, SLIP-RESISTANT

### *DESCRIPTION:*

The BootzCast is a 60" x 30" x 14 1/4" bathtub encased with premium insulation designed for maximum warmth, minimal noise and ultimate durability. The BootzCast is "the affordable alternative to cast iron" designed to improve heat retention and prevent handling and installation damage. The BootzCast has a 40 degree lumbar support for a more comfortable bathing experience. Construction is one piece heavy gauge seamless steel with an acid resistant porcelain enamel finish. BootzCast weighs 72 lbs., easy to install into a bathtub alcove - "just set it and level it". The full length support pad offers added strength and sound deadening. This product is compatible or complies with ASME A112.19.1/CSA B45.2 (Standard for Enameled Steel Plumbing Fixtures), ADA (American Disabilities Act), ASTM F 462 (Safety Specification for Slip Resistant Bathing Facilities), ASTM E 162 (Test Method for Surface Flammability), ASTM E 662 (Test Method for Smoke Density), ANSI Z124.1.2sec5.6 (Ignition Test), WW-P 541 (U.S. Military Federal Specification), HUD-FHA-VA, LEED, and the Buy American Act, as applicable when installed accordingly. Available in white, bone and biscuit colors with a right and left drain. Made in the USA.

Weight: 72 lbs



# BOOTZCAST PORCELAIN ENAMEL 60" X 30" X 14 1/4" BATHTUB


## BootzCast 5' Bathtub

60" x 30" x 14 1/4"

Standard Outlet

011-7200 RH Drain, slip-resistant

011-7201 LH Drain, slip-resistant

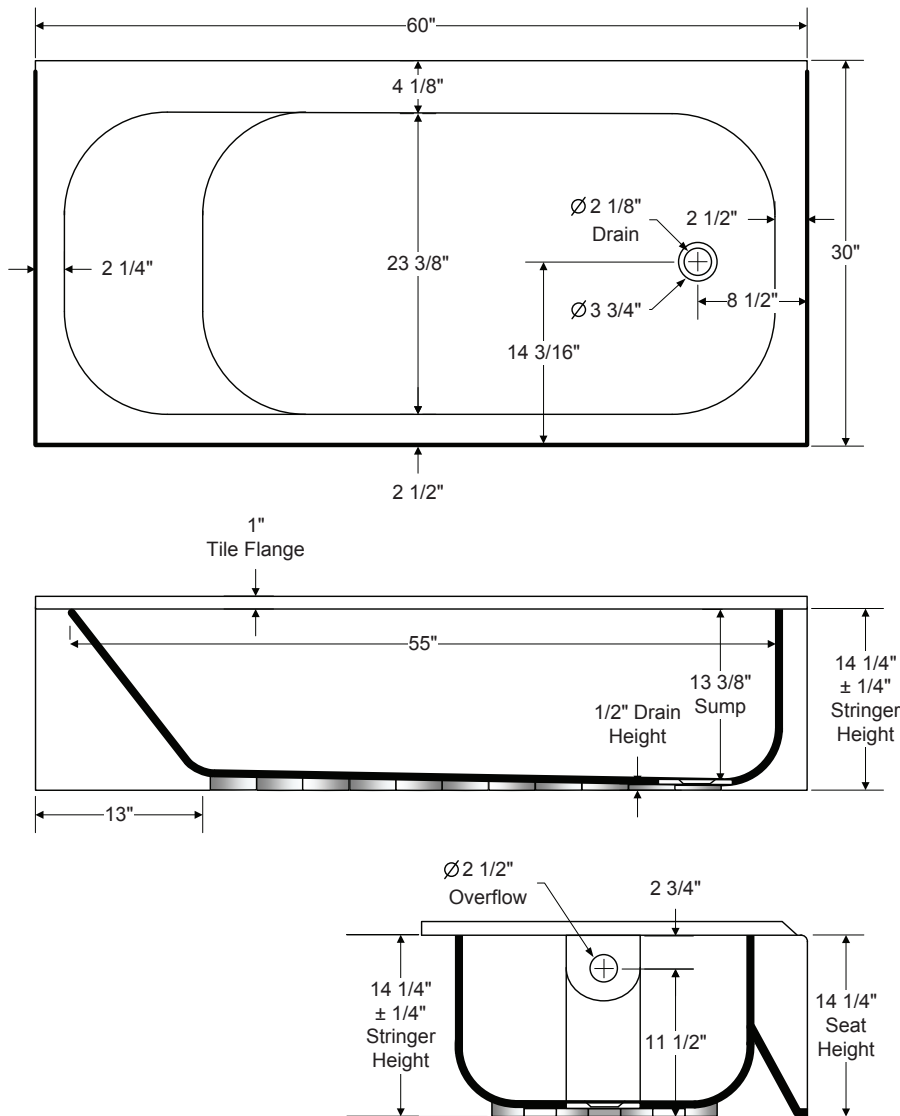

## Complies with:

All fixtures are compatible or comply with ANSI, ASME, CSA, WW-P 541, HUD-FHA-VA, LEED and the "Buy America Act" where applicable when installed accordingly.

## Standard Features:

"The affordable alternative to cast iron"  
Premium sound absorbing insulation  
Slip resistant bottom  
Set it and level it

## Made in the USA



All Dimensions ±1/8" unless otherwise noted.  
Dimensions shown are for reference.  
Actual dimensions may vary slightly and should be checked prior to installation  
Rev. 12.07.18