

# BradyPrinter M611 / BMP®61 Materials

BradyID.com/s36

## Wire and Cable Materials

### PermaSleeve® PS Polyolefin Wire Markers (B-342)

Military / industrial grade sleeves offer the ultimate in marker durability, permanence and aesthetic appearance. 3:1 heat-shrinkable markers fit snugly around wires, are fade-resistant and flame-retardant. Temp range: -67° F to 275° F (-55° C to 130° C). RoHS compliant and UL recognized.

#### Meets specifications:

- SSAE-AS-23053/5
- SAE-AS-81531

#### Tested per:

- ASTM E162
- ASTM E662
- MIL-STD-202


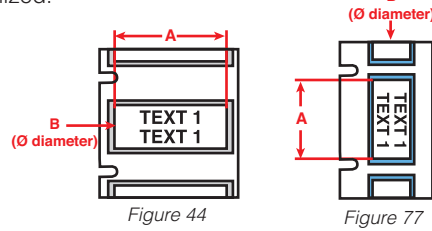


Figure 44

Figure 77

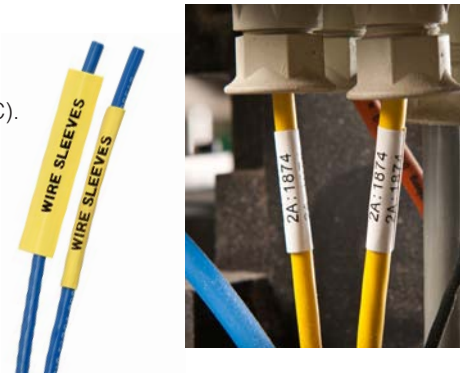

Fits Printers	Figure	Catalog #	Color	Approx. Wire Gauge	Minimum Wire Dia. Inch (mm)	Maximum Wire Dia. Inch (mm)	Diameter as Supplied B Inch (mm)	Recovered Diameter Inch (mm)	Sleeve Width A Inch (mm)	Qty. Per Roll	Rec. Ribbon (M611 / BMP61)
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-094-1-WT	White	28 to 18	0.023 (0.6)	0.080 (2)	0.094 (2.4)	0.023 (0.6)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-094-175-WT	White	28 to 18	0.023 (0.6)	0.080 (2)	0.094 (2.4)	0.023 (0.6)	1.750 (44.5)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 77	** PSPT-094-2-WT-R	White	28 to 18	0.023 (0.6)	0.080 (2)	0.094 (2.4)	0.023 (0.6)	2.000 (50.8)	70	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-125-1-WT	White	22 to 16	0.046 (1.2)	0.110 (2.8)	0.125 (3.2)	0.046 (1.2)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-125-175-WT	White	22 to 16	0.046 (1.2)	0.110 (2.8)	0.125 (3.2)	0.046 (1.2)	1.750 (44.5)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 77	** PSPT-125-2-WT-R	White	22 to 16	0.046 (1.2)	0.110 (2.8)	0.125 (3.2)	0.046 (1.2)	2.000 (50.8)	70	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-187-1-WT	White	18 to 12	0.062 (1.6)	0.150 (3.8)	0.187 (4.8)	0.062 (1.6)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-187-175-WT	White	18 to 12	0.062 (1.6)	0.150 (3.8)	0.187 (4.8)	0.062 (1.6)	1.750 (44.5)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 77	** PSPT-187-2-WT-R	White	18 to 12	0.062 (1.6)	0.150 (3.8)	0.187 (4.8)	0.062 (1.6)	2.000 (50.8)	70	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-250-1-WT	White	16 to 10	0.094 (2.4)	0.215 (5.5)	0.250 (6.4)	0.094 (2.4)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-250-175-WT	White	16 to 10	0.094 (2.4)	0.215 (5.5)	0.250 (6.4)	0.094 (2.4)	1.750 (44.5)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 77	** PSPT-250-2-WT-R	White	16 to 10	0.094 (2.4)	0.215 (5.5)	0.250 (6.4)	0.094 (2.4)	2.000 (50.8)	70	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-375-1-WT	White	12 to 6	0.125 (3.2)	0.320 (8.1)	0.375 (9.5)	0.125 (3.2)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-375-175-WT	White	12 to 6	0.125 (3.2)	0.320 (8.1)	0.375 (9.5)	0.125 (3.2)	1.750 (44.5)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 77	** PSPT-375-2-WT-R	White	12 to 6	0.125 (3.2)	0.320 (8.1)	0.375 (9.5)	0.125 (3.2)	2.000 (50.8)	70	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-500-1-WT	White	8 to 1	0.187 (4.8)	0.450 (11.4)	0.500 (12.7)	0.187 (4.8)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-500-175-WT	White	8 to 1	0.187 (4.8)	0.450 (11.4)	0.500 (12.7)	0.187 (4.8)	1.750 (44.5)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 77	** PSPT-500-2-WT-R	White	8 to 1	0.187 (4.8)	0.450 (11.4)	0.500 (12.7)	0.187 (4.8)	2.000 (50.8)	70	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-750-1-WT	White	8 to 1	0.250 (6.4)	0.700 (17.8)	0.750 (19.1)	0.250 (6.4)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-750-175-WT	White	8 to 1	0.250 (6.4)	0.700 (17.8)	0.750 (19.1)	0.250 (6.4)	1.750 (44.5)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 77	** PSPT-750-2-WT-R	White	8 to 1	0.250 (6.4)	0.700 (17.8)	0.750 (19.1)	0.250 (6.4)	2.000 (50.8)	70	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-1000-1-WT	White	500 to 1	0.375 (9.5)	0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	1.000 (25.4)	50	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-1000-175-WT	White	500 to 1	0.375 (9.5)	0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	1.750 (44.5)	50	M61-R6610
M611, BMP61, 71*, TLS	Fig. 77	** PSPT-1000-2-WT-R	White	500 to 1	0.375 (9.5)	0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	2.000 (50.8)	70	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-094-1-YL	Yellow	28 to 18	0.023 (0.6)	0.080 (2)	0.094 (2.4)	0.023 (0.6)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-094-175-YL	Yellow	28 to 18	0.023 (0.6)	0.080 (2)	0.094 (2.4)	0.023 (0.6)	1.750 (44.5)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 77	** PSPT-094-2-YL-R	Yellow	28 to 18	0.023 (0.6)	0.080 (2)	0.094 (2.4)	0.023 (0.6)	2.000 (50.8)	70	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-125-1-YL	Yellow	22 to 16	0.046 (1.2)	0.110 (2.8)	0.125 (3.2)	0.046 (1.2)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-125-175-YL	Yellow	22 to 16	0.046 (1.2)	0.110 (2.8)	0.125 (3.2)	0.046 (1.2)	1.750 (44.5)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 77	** PSPT-125-2-YL-R	Yellow	22 to 16	0.046 (1.2)	0.110 (2.8)	0.125 (3.2)	0.046 (1.2)	2.000 (50.8)	70	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-187-1-YL	Yellow	18 to 12	0.062 (1.6)	0.150 (3.8)	0.187 (4.8)	0.062 (1.6)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-187-175-YL	Yellow	18 to 12	0.062 (1.6)	0.150 (3.8)	0.187 (4.8)	0.062 (1.6)	1.750 (44.5)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 77	** PSPT-187-2-YL-R	Yellow	18 to 12	0.062 (1.6)	0.150 (3.8)	0.187 (4.8)	0.062 (1.6)	2.000 (50.8)	70	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-250-1-YL	Yellow	16 to 10	0.094 (2.4)	0.215 (5.5)	0.250 (6.4)	0.094 (2.4)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-250-175-YL	Yellow	16 to 10	0.094 (2.4)	0.215 (5.5)	0.250 (6.4)	0.094 (2.4)	1.750 (44.5)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 77	** PSPT-250-2-YL-R	Yellow	16 to 10	0.094 (2.4)	0.215 (5.5)	0.250 (6.4)	0.094 (2.4)	2.000 (50.8)	70	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-375-1-YL	Yellow	12 to 6	0.125 (3.2)	0.320 (8.1)	0.375 (9.5)	0.125 (3.2)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-375-175-YL	Yellow	12 to 6	0.125 (3.2)	0.320 (8.1)	0.375 (9.5)	0.125 (3.2)	1.750 (44.5)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 77	** PSPT-375-2-YL-R	Yellow	12 to 6	0.125 (3.2)	0.320 (8.1)	0.375 (9.5)	0.125 (3.2)	2.000 (50.8)	70	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-500-1-YL	Yellow	8 to 1	0.187 (4.8)	0.450 (11.4)	0.500 (12.7)	0.187 (4.8)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-500-175-YL	Yellow	8 to 1	0.187 (4.8)	0.450 (11.4)	0.500 (12.7)	0.187 (4.8)	1.750 (44.5)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 77	** PSPT-500-2-YL-R	Yellow	8 to 1	0.187 (4.8)	0.450 (11.4)	0.500 (12.7)	0.187 (4.8)	2.000 (50.8)	70	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-750-1-YL	Yellow	8 to 1	0.250 (6.4)	0.700 (17.8)	0.750 (19.1)	0.250 (6.4)	1.000 (25.4)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-750-175-YL	Yellow	8 to 1	0.250 (6.4)	0.700 (17.8)	0.750 (19.1)	0.250 (6.4)	1.750 (44.5)	100	M61-R6610
M611, BMP61, 71*, TLS	Fig. 77	** PSPT-750-2-YL-R	Yellow	8 to 1	0.250 (6.4)	0.700 (17.8)	0.750 (19.1)	0.250 (6.4)	2.000 (50.8)	70	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-1000-1-YL	Yellow	500 to 1	0.375 (9.5)	0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	1.000 (25.4)	50	M61-R6610
M611, BMP61, 71*, TLS	Fig. 44	** PSPT-1000-175-YL	Yellow	500 to 1	0.375 (9.5)	0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	1.750 (44.5)	50	M61-R6610
M611, BMP61, 71*, TLS	Fig. 77	** PSPT-1000-2-YL-R	Yellow	500 to 1	0.375 (9.5)	0.950 (24.1)	1.000 (25.4)	0.375 (9.5)	2.000 (50.8)	70	M61-R6610

\*\* ⚠️ WARNING: Cancer www.P65Warnings.ca.gov

Portable Printers

M611 / BMP61