For Residential and Commercial Applications				
Job Name	Engineer / Architect			
Job Location	Wholesaler			
Submittal Date	Contractor			

R1701DVS Multi-Turn Dual Outlet, Dual Shut-off Stop – Female Iron Pipe Inlet w/ Same Side Outlets

Use: For use with water in accessible locations only. Not intended for recirculating water systems that produce continuous use temperatures above 115° F. For those applications, use our KT[™] series ball stops.

Design Features:


- **Independent flow control.** Dual outlet, dual shut-off operation permits water flow to be controlled at one fixture while maintaining flow to the other fixture
- Code approved replacement for areas requiring separate shut-offs for two lines
- Forged one-piece brass body provides strength, durability and long-lasting performance
- Knurled oval handles provide a secure grip and smooth on/off operation
- Easy-to-remove handles with screw attachment helps protect against accidental operation during the rough-in phase
- 100% compliant stops available

Operating Specifications:

Temperature:40°- 140° FPressure:125 PSI maximum

Standard

STOP MATERIAL SPECIFICATIONS				
Valve Body	Brass			
Stems	POM			
Bib & Packing Washers	Nitrile rubber			
Packing Nuts	Brass			
Handles	Metal			
Handle Screws	Steel, zinc-plated			
Compression Sleeves	Brass			
Compression Nuts	Brass			

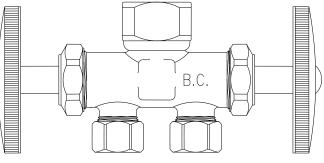

Compliant

STOP MATERIAL SPECIFICATIONS				
Valve Body	Compliant brass			
Stems	POM			
Bib & Packing Washers	Nitrile rubber			
Packing Nuts	Brass			
Handles	Metal			
Handle Screws	Steel, zinc-plated			
Compression Sleeves	Brass			
Compression Nuts	Brass			

Standard Part Listing:

R1701DVS R

R 1/2" FIP x 3/8" OD Compression x 3/8" OD Compression, rough brass

Compliant Part Listing:

R1701DVSX R 1/2" FIP x 3/8" OD Compression x 3/8" OD Compression, rough brass

This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg if requested.


BrassCraft®

© 2012 BrassCraft Mfg.

400.143 R1701DVS Multi-Turn Dual Outlet-Dual Shut-Off Stop - FIP Inlet REV 02/12

R1701DVS Multi-Turn Dual Outlet, Dual Shut-off Stop – Female Iron Pipe Inlet w/ Same Side Outlets

PART DIMENSIONS (Inches)						
Model	DIM. A	DIM. B	DIM. C			
R1701DVS	1.05	1.07	4.30			

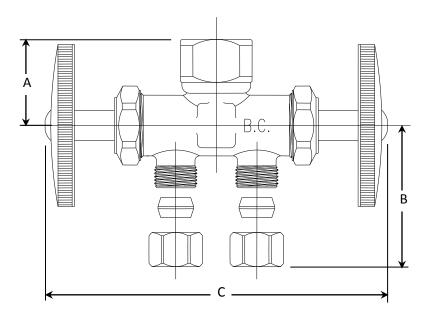

Listings & Certifications:

- IAPMO listed to ASME A112.18.1 / CSA B125.1 (File # 0645)
- CSA listed to ASME A112.18.1 / CSA B125.1 (File # 204593)
- Compliant product CSA approved. Listed to Low-Lead Content Certification Program – Plumbing Products Class 6853-01.



This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft Mfg. This specification must be returned to BrassCraft Mfg if requested.

