



see what Delta can do™

# SHOWER HEAD

## ■ Single Spray Setting Shower Head

### STANDARD SPECIFICATIONS

- Maximum 1.5 gpm @ 80 psi, 5.7 L/min @ 550 kPa for 52653-PK.
- Maximum 2.5 gpm @ 80 psi, 9.5 L/min @ 550 kPa for 52667-PK.
- 2 1/4" diameter spray face: 52653-PK.
- 2 1/2" diameter spray face: 52667-PK.


### WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



### COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense® - Applies to 52653-PK only

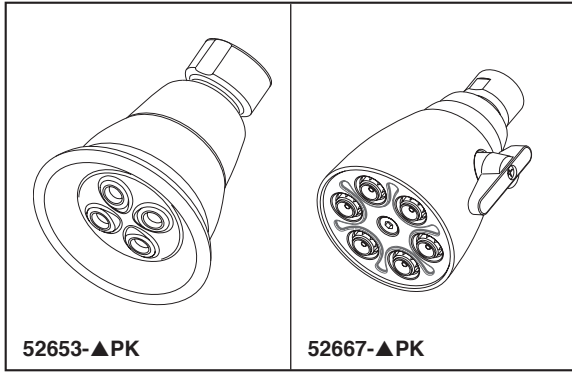

Submitted Model No.: \_\_\_\_\_

Specific Features: \_\_\_\_\_

**52653-▲PK 1.5 GPM Shower Head**

High-Efficiency  
Spray

---

**52667-▲PK 2.5 GPM Shower Head**

Adjustable  
Full Spray

▲ Designate proper finish suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or [www.deltafaucet.com](http://www.deltafaucet.com) for finish options and product availability.

DSP-B-52653-PK Rev. D

### Delta Faucet Company

55 E. 111th Street, Indianapolis, IN 46280  
350 South Edgeware Road, St. Thomas, ON N5P 4L1  
© 2017 Delta Faucet Company