

(1) Available Optional Swing Spouts. These spouts can ONLY be added to Outlet Option No. 8 and 55C1090. Refer to www.specselect.com for individual models.

9

Note: Use this page front and back as a product submittal sheet.

9

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

9

DSP-55C Rev. C

 $\checkmark$ 

Ŀ



## **Approvals:**

CSA certified

FLOW (L/min)

13

12

11

10

9 8

7


6

5

4 3 2

0

- Complies to ASME A112.18.1/CSA B125.1
- Lever Blade Handle ADA Compliant and meets Handicapped Accessibility Standard ICC/ANSI A117.1/ ADA of less than 5 lbs. operating force.
- Verified compliant with 0.25% weighted average Pb content regulations.
- "For Commercial Use Only"
- (Contact Delta Representative for State and/or Local Approvals.)

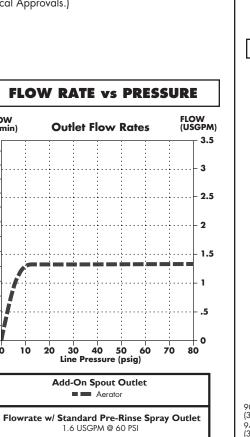

Flowrate w/ Energy Saver Pre-Rinse Spray Face (Also supplied with standard product) 1.2 USGPM @ 60 PSI

**PRODUCT VARIATION No. 5** 

**INLETS** - 1/2 - 14 NPT (Female) or 1/2 - 14 NPT (Male) with Supplied Nipple

**PRODUCT VARIATION No. 2 & 3 INLETS** - 3/8 or 1/2" Flexible Riser or 1/2 - 14 NPSM Coupling Nut (Supplied)

Note: Measurements may vary ± 6mm (0.25")

Refer to www.specselect.com for individual models.



Delta reserves the right [1] to make changes in specifications and materials, and [2] to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

Note: Use this page front and back as a product submittal sheet.



## **Pre-Rinse Faucets**

