

# ELAVT0008ARI Rough-In Box for E-Lav Faucets

**TECK**<sup>®</sup>  
COMMERCIAL

**DELTA**

## SPECIFICATION:

- Control Box Rough-In
- For recessed wall mounting
- 10" square metal box with cover
- Hot and Cold inlet supplies
- Point of use thermostatic mixing valve
- Integral check valves in hot and cold inlets to prevent crossflow
- Outlet temperature range 95-120°F (35-49°C)
- Maximum flow 11 gpm (42 L/min) @ 45 psi pressure loss, minimum flow 0.34 gpm (1.36 L/min)
- Factory assembled waterway components with stops

## APPROVALS:

- CSA certified to CSA B125.3 and NSF 372
- Complies to ASSE 1069 and ASSE 1070/ ASME A112.1070/ CSA B125.70 and NSF 61 Section 9
- Verified compliant with 0.25% weighted average Pb content regulations



(Contact Delta Representative for State and/or Local Approvals.)

## Engineer/Architect Approval


Model Specified:

Approval:

Date:

### ELAVT0008ARI Thermostatic Mix Version

**NOTE:** High Temperature disinfection cycles not recommended for #8 Control Box as the thermostatic mixing valve limits the higher temperature water flow output.

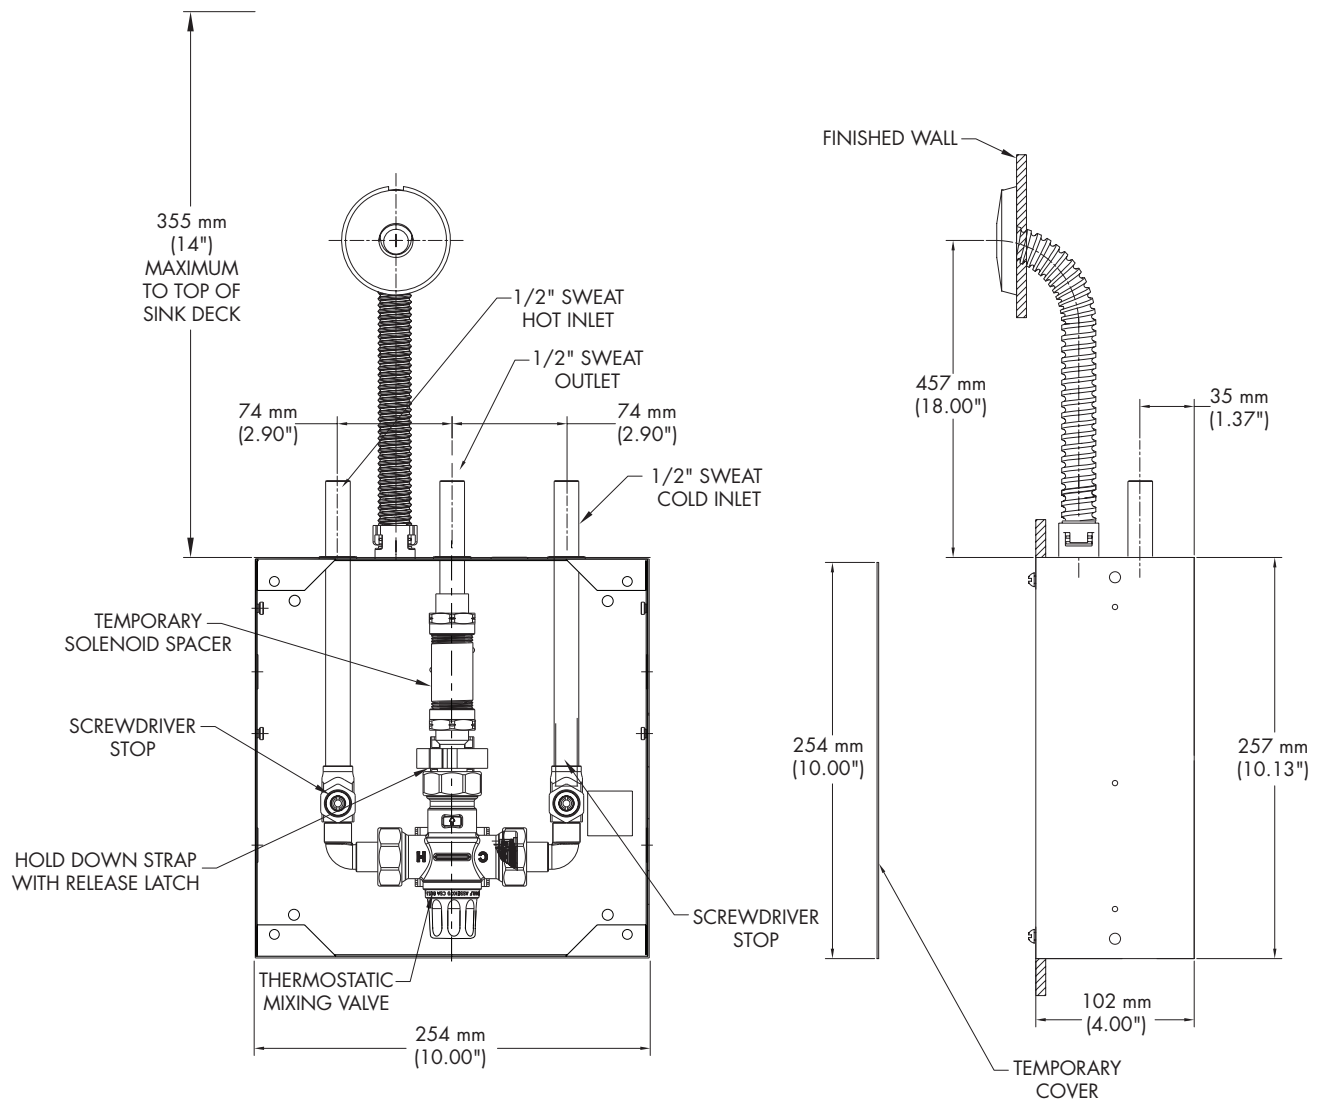

Note: Measurements may vary  $\pm$  6mm (0.25")

Refer to [www.specselect.com](http://www.specselect.com) for individual models.

Note: Use this page as a product submittal sheet.

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or [www.specselect.com](http://www.specselect.com) for finish options and product availability.

**DSP-ELAVTA8 Rev. D**