

### F17 Jumbo Airline Filters




**Features:**

- general purpose with low pressure drop and excellent water removal characteristics
- 40 micron element
- 1 qt. reservoir
- inlet pressure: **250 PSI** and **175°F (79°C)**

**Metal Bowl and Sight Glass**

Port Size	Flow (SCFM)	Automatic Drain Part #	Manual Drain Part #
3/4"	325	<b>F17-600A</b>	<b>F17-600M</b>
1"	425	<b>F17-800A</b>	<b>F17-800M</b>
1 1/4"	425	<b>F17-A00A</b>	<b>F17-A00M</b>
1 1/2"	425	<b>F17-B00A</b>	<b>F17-B00M</b>

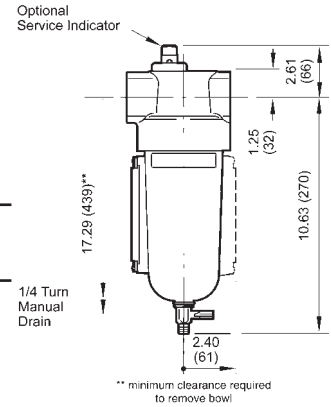


**Features:**

- 40 micron element
- quick-release bayonet bowl
- prismatic lens liquid level indicator
- 7 oz. reservoir
- inlet pressure: **250 PSI** and **175°F (79°C)**

**Metal Bowl and Sight Glass**

Port Size	Flow (SCFM)	Automatic Drain Part #	Manual Drain Part #
2"	1400	<b>F18-C00A</b>	<b>F18-C00M</b>




### F74 Oil Removal Filters

**Features:**

- provides air quality class 2 hydrocarbon and class 1 particulate removal per ISO 8573-1
- element removes particles down to 0.01mm. Maximum remaining oil content of air leaving the filter is 0.01 ppm at **70°F (21°C)** with an inlet concentration of 8 ppm
- For maximum service life install a general purpose filter upstream of the oil removal filter.
- service life indicator turns from green to red when element needs to be replaced
- in-line or modular installation
- quick-release bayonet bowl
- prismatic lens liquid level indicator
- inlet pressure: **250 PSI** and **150°F (66°C)**



Port Size	Flow (SCFM) Saturated	SCFM Dry	Automatic Drain Part #
3/8"	35	70	<b>F74C-3A-MB</b>
1/2"	35	75	<b>F74C-4A-MB</b>
1/2"	60	100	<b>F74H-4A-MB</b>
3/4"	60	120	<b>F74H-6A-MB</b>



See pages 422 to 427 for accessories.

**!** FRL's are designed for air service only, unless otherwise indicated.

SCFM ratings at 90 PSIG inlet pressure.