

GENERAL

Highest quality sink bowl seamlessly formed of #18 gauge, type 304 (18-8) nickel bearing stainless steel. Underside of sink is fully protected by heavy duty Sound Guard [®] undercoating.

DESIGN FEATURES

Bowl Depth: 5-15/16".

Finish: Exposed surfaces are polished to a non-directional soft satin finish.

Underside: Fully protected by heavy duty Sound Guard [®] undercoating to dampen sound and reduce condensation.

OTHER

Drain Opening: 1-1/2" (38mm), 2-1/4" (57mm) O.D at top of countersink. Arranged for standard lavatory type drain fitting. Overflow: Sink comes with overflow assembly.

Note: All Elkay custom design undermount sinks are designed to affix easily to the underside of any solid surface countertop. Installation: See illustration below.

Sink complies with ASME A112.19.3-08/CSA B45.4-08.




These sinks are listed by the International Association of Plumbing and Mechanical Officials as meeting the le requirements of the Uniform Plumbing Code.

OPTIONAL ACCESSORIES


Mounting Hardware: LKUCLIP8


SINK DIMENSIONS*




	Overall		Inside Bowl				/I		Minimum
Model Number	L	w	L		w		D	Cutout in Countertop	Cabinet Size
ELUH1812	21	15	18	9/16	12	1/2	5 15/16	See Template **	27
	533 (mm)	381 (mm)	471	(mm)	318	(mm)	151 (mm)		686 (mm)

*Length is left to right. Width is front to back. **Template packed with every sink.





Installation Profile of ELUH Single Bowl Model The template provided with each ELUH sink provides the only type of installation recommended by Elkay.

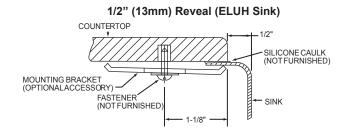

Model ELUH1812 Illustrated

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice

This specification describes an Elkay product with design, guality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.

2222 Camden Court Oak Brook, IL 60523