

51/2" Scale Size
 ± 1 Scale Division
 Accuracy
 Cast Aluminum Case
 Rigid Straight or
 Rigid 90°Angle Case

The Trerice **Econo Thermometer** provides accuracy and durability at an economical price. This liquid-in-glass thermometer has a durable cast aluminum case and a polycarbonate frame front and window. Rigid straight and rigid 90° angle cases are available.

- Optional features available:
 Please consult the Options &
 Accessories Section for details.
 - Trerice Econo Thermometers (air-duct stem excluded) have no external mounting hardware, and as such, require the use of a thermowell, which is attached to the stem via a set screw. The thermowell must be ordered separately please refer to page 153 of the Thermowell Section.

| Specifications | | | | | | |
|------------------------|--|--|--|--|--|--|
| Models 4350 4352 | Scale Size 51/2" Rigid Straight 51/2" Rigid 90° Angle | | | | | |
| Fill Type | Spirit: Blue colored, organic | | | | | |
| Case | Cast aluminum, blue epoxy finish | | | | | |
| Stem | Aluminum, brass or air-duct style | | | | | |
| Connection | Use of thermowell required (must be ordered separately) Air-duct stem has mounting flange with 3 bolt holes | | | | | |
| Window | Polycarbonate frame front | | | | | |
| Tube | Lens front, magnifying type | | | | | |
| Scale | Aluminum, white background with black graduations and markings | | | | | |
| Accuracy | ±1 scale division | | | | | |
| Approximate | e Shipping Weight | | | | | |
| | 0.5 lbs [0.23 kg] | | | | | |

Sample Order Number: 4350 1 02 07

HOW TO ORDER

| Model | Stem (Material) | Stem (Length) | Specific Range | | |
|--|-----------------------------------|--|------------------------|--|--|
| 4350 Straight 4352 90° Angle | 1 Aluminum* 2 Brass 9 Air-Duct ** | 02 2" (Aluminum Stem only) 04 4" (Brass Stem only) 06 6" (Air-Duct Stem) | See Standard Ranges | | |


^{*}Use of thermowell required (must be ordered separately-refer to page 153).



^{**}Model 4352 only

Econo-Therm

All dimensions are nominal. Dimensions in [] are in millimeters.

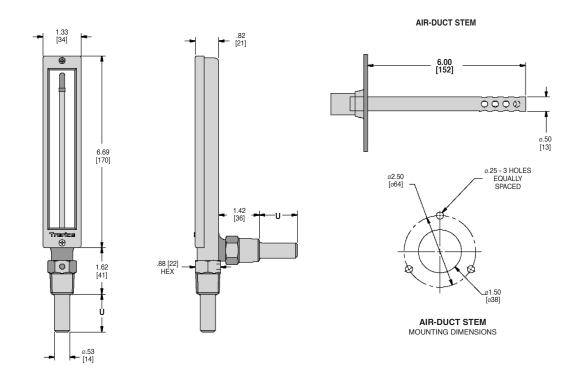

Note: Shown with required thermowell (must be ordered separately. Refer to page 153.)

| U L | ength | Dimension | | | |
|-----|------------|-----------|---------|--|--|
| 2" | (Aluminum) | 1.31 | [33.3] | | |
| 4" | (Brass) | 3.25 | [82.6] | | |
| 6" | (Air-Duct) | 6.00 | [152.4] | | |

Standard Ranges

| Fahr | Fahrenheit Scale Celsius Scale | | Dual Scale | | Fahrenheit | | Celsius | | |
|---------------|--------------------------------|---------------|--------------|---------------|------------------------------|---------------------|--------------------|---------------------|--------------------|
| Range Code | Range | Range Code | Range | Range Code | e Range | Figure Intervals | Minor Divisions | Figure Intervals | Minor Divisions |
| 01 | –40° to 110°F | 17 | –40° to 40°C | 41 | -40° to 110°F & -40° to 40°C | 20° | 2° | 10° | 1° |
| 03 | 30° to 130°F | 25 | 0° to 55°C | 43 | 30° to 130°F & 0° to 55°C | 10° | 1° | 5° | 1° |
| 06 | 30° to 180°F | 27 | 0° to 83°C | 46 | 30° to 180°F & 0° to 83°C | 20° | 2° | 10° | 1° |
| 07 | 30° to 240°F | 19 | 0° to 115°C | 47 | 30° to 240°F & 0° to 115°C | 20° | 2° | 10° | 1° |

Dual scale figure intervals may differ.

