
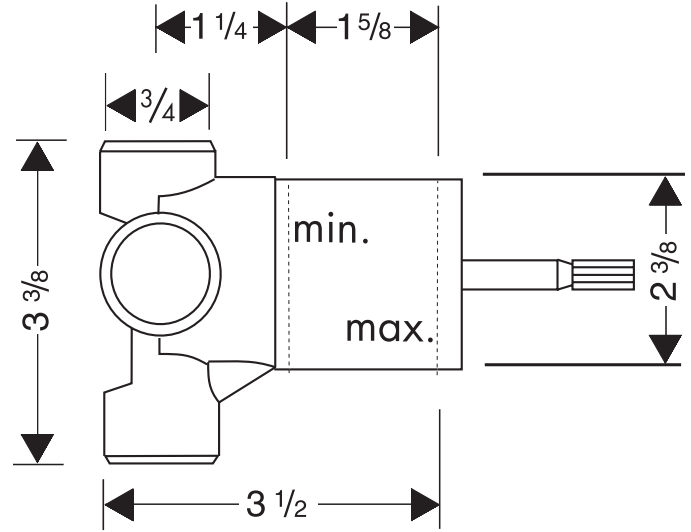


Rough, Quattro Four-Port Diverter 13932181

Listed by Underwriters Laboratories

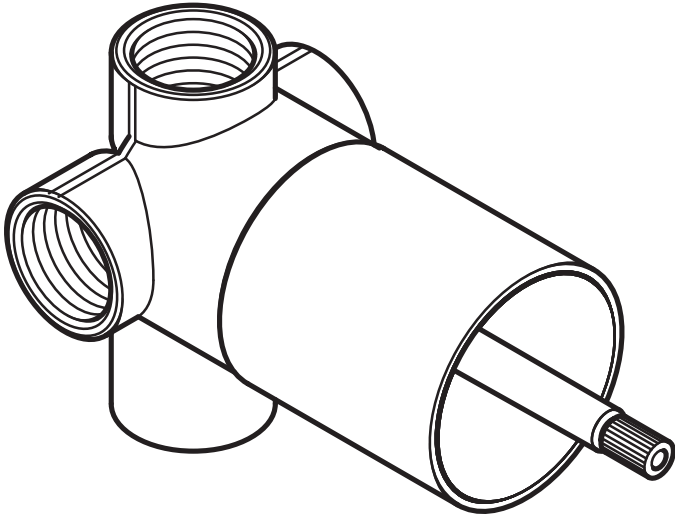

Product Specification

Controls 3 outlets

Outlets can be used individually or any two in combination

3/4" NPT female connections

Max. flow rate @ 45 PSI 17 GPM*

Ceramic cartridge

No "off" position - volume control required

*Actual flow rate is limited to that of the mixing valve.