


## INSTALLATION INSTRUCTIONS

3.5" BASKET STRAINER, DR320

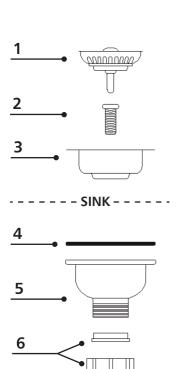

- Apply a small bead of 100% silicone (non-water based) to the underside of strainer body flange (3).
- 2. Place strainer body (3) into sink.
- 3. Place rubber seal (4) on top of drain cup (5).
- 4. Place tightening screw(2) into center of strainer body (3) and secure.
- 5. Lubricate (1) with liquid soap. Place strainer basket (1) into strainer body (3).
- 6. Attach drain pipe (not shown) to drain cup (5) using nut (6).

Remove all excess silicone around the drain after the drain has been installed

WWW.NATIVETRAILSHOME.COM