



# Brella™ Comfort Height®

two-piece elongated 1.28 gpf toilet  
402095

## Features

- Two-piece toilet.
- Elongated bowl offers added room and comfort.
- Skirted trapway simplifies cleaning.
- Comfort Height feature offers chair-height ADA-compliant seating.
- 1.28 gallons per flush (gpf).
- Standard left-hand Polished Chrome trip lever included.
- 2-inch fully glazed trapway.
- Combination consists of the 402101 bowl and 402098 tank.

## Material

- Vitreous china.

## Technology

- Uses the force of gravity and a precision-engineered tank, bowl, and trapway to deliver virtually plug-free performance.

## Installation

- Standard 12-inch rough-in.
- Patented ReadyLock™ installation system is a simple solution for skirted toilets that saves time, hassle, and eliminates the need to drill into the floor for a standard 12-inch rough-in.
- Seat and supply line not included.


## Recommended Accessories

K-4008 Reveal® Quiet-Close™ Elongated Toilet Seat  
K-7637 Angle Supply with Stop (single)

## Components

Product includes:

402098 1.28 gpf toilet tank with left-hand trip lever  
402101 Elongated toilet bowl with skirted trapway  
Additional included component/s: Tank Cover, Trip Lever, and ReadyLock™ installation system.

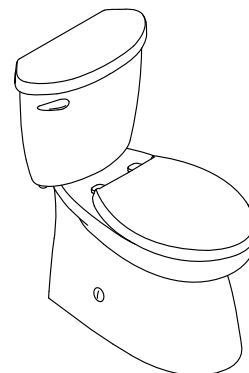

ADA CSA B651 OBC

## Codes/Standards

DOE - Energy Policy Act 1992  
EPA WaterSense®  
California Energy Commission (CEC)  
ADA  
ICC/ANSI A117.1  
CSA B651  
OBC

## STERLING® Warranty - Toilets and Lavatories


See website for detailed warranty information.

## Available Color/Finishes

*Color tiles intended for reference only.*

### Color Code Description

■ 0 White

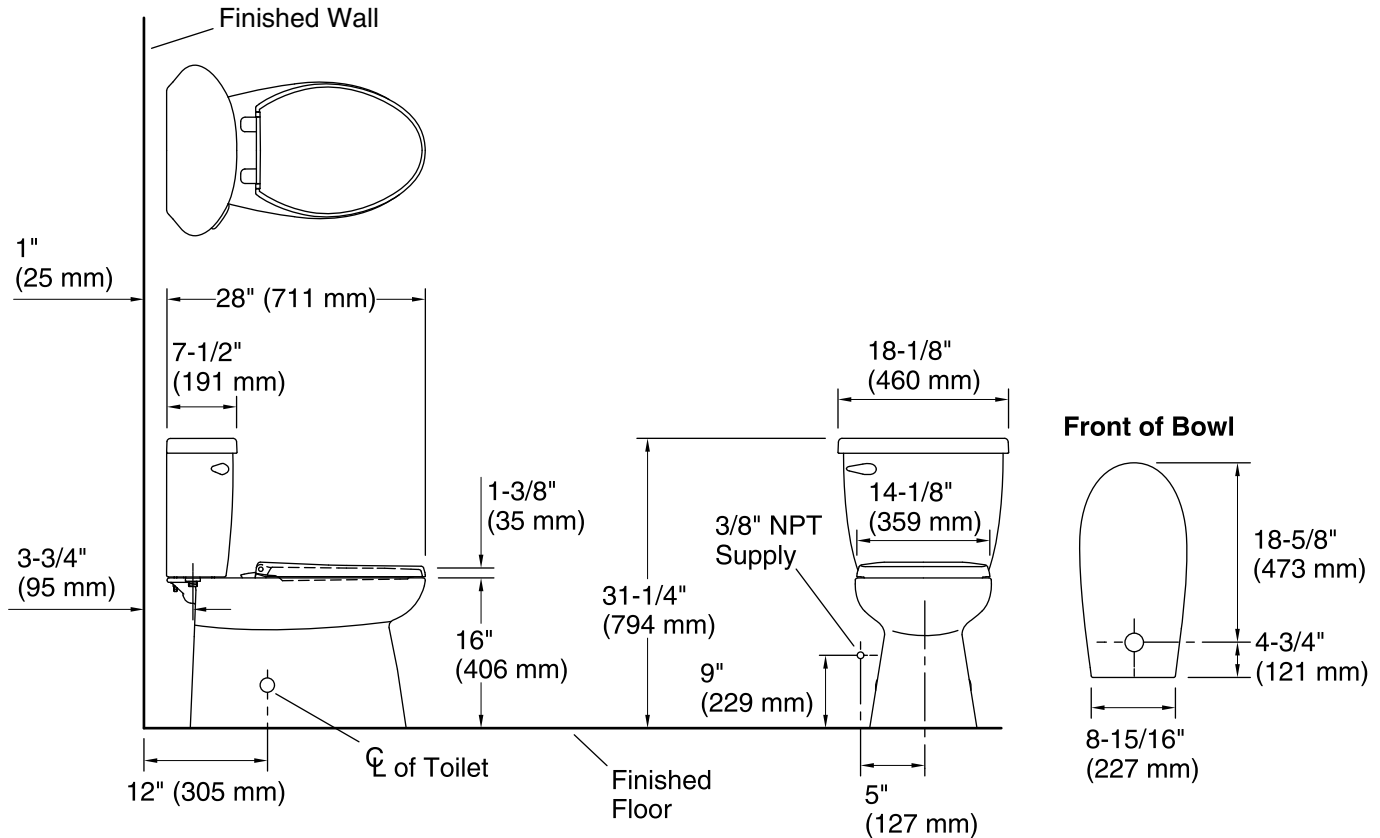

### Technical Information

All product dimensions are nominal.

- Toilet type: Two-piece, Floor-mount
- Bowl shape: Elongated
- Trap passageway: 2" (51 mm)
- Water Consumption
  - Full: 1.28 gpf (4.8 lpf)
- Water surface size: 5-1/16" x 4-9/16" (129 mm x 115 mm)
- Rim to water surface: 8-9/16" (217 mm)
- Rough-in: 12
- Seat-mounting holes: 5-1/2" (140 mm)

### Fixture Supply Requirements

- Min static pressure: 15 psi (103.4 kPa)
- Max static pressure: 80 psi (551.6 kPa)

### Notes

- Install this product according to the installation instructions.
- ADA compliance will require a seat 1-inch thick minimum.
- ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.
- Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.
- Accessibility standards may require controls to be located on the open side of the toilet.