

# Features

- 15" (381 mm) apron.
- Tongue-and-groove walls with snap-together installation.
- High-gloss walls.
- Full caulking required in all seams.
- Acrylic towel bar.
- Aging in Place backerboards.

### Material

• Made from solid Vikrell<sup>®</sup> material for strength, durability, and lasting beauty.

### Installation

- Alcove.
- Left drain.

#### **Recommended Products/Accessories**

5405-59 Frameless sliding bath door 5900-57 Framed sliding bath door 5900-59 Framed sliding bath door 5905-57 Framed sliding bath door 5905-59 Framed sliding bath door 5906-59 Framed sliding bath door 5907-59 Framed sliding bath door 542808-59 Frameless sliding bath door 581005-59 Frameless sliding bath door 80001012 12" straight grab bar 80001018 18" straight grab bar 80001024 24" straight grab bar 80011032 32" straight grab bar 80001036 36" straight grab bar VA-80172 30" x 35" window trim kit K-23726 Drain treatment K-23733 Vikrell® cleaner

#### **Included Components**

Product consists of:

71044106 60" x 30-1/4" bath/shower wall set w/AIP backerboards 71041110 60-1/4" x 29" bath



Performa<sup>™</sup>



60" bath/shower w/ AIP backerboards

# **Codes/Standards**

CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 HUD, UM Bulletin 73

# Warranty – Bathing Fixtures (and) Kitchen and Utility Sinks Made of Solid Vikrell<sup>®</sup> Material

See website for detailed warranty information.

### **Available Colors/Finishes**

Color tiles intended for reference only.

#### **Color Code Description**

96




0 White

KOHLER Biscuit





60" bath/shower w/ AIP backerboards 71040116

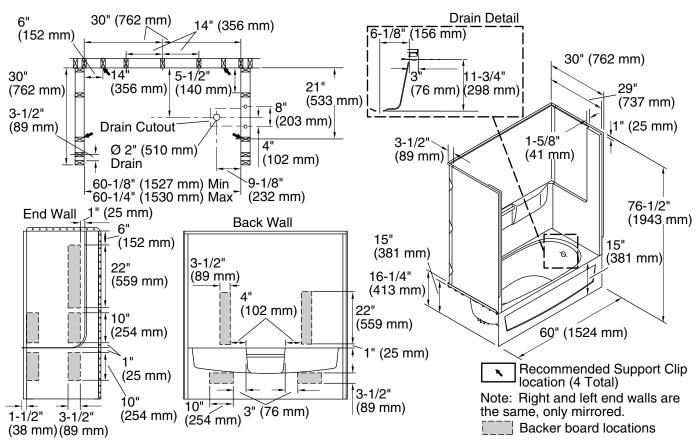

# **Technical Information**

All product dimensions are nominal.

Installation:	Three-wall alcove
Drain location:	Left
Basin area, bottom:	21" x 39" (533 mm x 991 mm)
Basin area, top:	24" x 53" (610 mm x 1346 mm)
Water depth:	10-1/4" (260 mm)
Water capacity:	35 gal (132.5 L)
Maximum door height:	59-1/2" (1511 mm)
Maximum door width:	56-3/4" (1441 mm)

# Notes

Install this product according to the installation instructions.

Studs should be positioned as shown.

Double studding is recommended for pivot shower door installations.

Attach grab bars at the specified backerboard locations only.