

### GUARD+™

60" Shower Base **72331100** 





### **Features**

- Four-sided water containment with full-length threshold guard and weep channels for added protection.
- Low 3-inch profile for easy entry and exit.
- Durable high gloss finish.
- 60" (1524 mm) x 34" (864 mm) x 3-1/8" (79 mm) base finished dimensions.

### Material

Compression molded from our exclusive Vikrell® material.

### Installation

 Suitable for tile down application or with STERLING STORE+™ wall surround.

### **Recommended Accessories**

5375EZ-57 Frameless Sliding Shower Door 5475-59 Frameless Sliding Shower Door 5477-59 Frameless Sliding Shower Door 5970-59 Framed Sliding Shower Door 5975-59 Framed Sliding Shower Door 5976-59 Framed Sliding Shower Door 5977-59 Framed Sliding Shower Door 547808-59 Frameless Bypass Shower Door 572075-59 Frameless Sliding Shower Door 581075-59 Frameless Sliding Shower Door 80001012 12" Grab Bar 80001014 18" Grab Bar 80001024 24" Grab Bar 72186104 Freestanding Seat



### Codes/Standards

CSA B45.5/IAPMO Z124 Greenguard UL 2818 - Gold HUD, UM Bulletin 73

# Warranty – Bathing Fixtures (and) Kitchen and Utility Sinks Made of Solid Vikrell® Material

See website for detailed warranty information.

### **Available Color/Finishes**


Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	<b>KOHLER Biscuit</b>



## GUARD+™

60" Shower Base **72331100** 

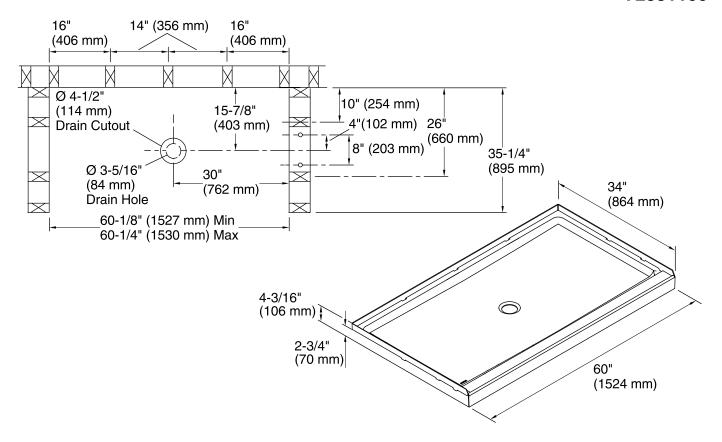

### **Technical Information**

All product dimensions are nominal.

Installation:

3-Wall Alcove

Drain location: Center

Drain hole diameter: 3-5/16" (84 mm)
Weight: 37.5 lbs (17 kg)
Minimum flat for door: 2-1/2" (64 mm)
Threshold height: 3-1/8" (79 mm)

#### **Notes**

Install this product according to the installation instructions.

Studs should be positioned roughly as shown. Double studding is recommended for pivot shower door installations.