

Features

- Optimized sprayface for maximum performance.
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup.
- 5-15/16" (151 mm) diameter sprayface.
- 2.0 gpm (7.6 l/min) maximum flow rate.

Technology

- Katalyst® air-induction technology infuses water with air, creating bigger drops for a more powerful spray.
- Katalyst® air-induction technology infuses water with air, creating bigger drops for a more powerful spray.

Installation

- 1/2" (12 mm) 14 NPT connection.
- Shower arm and flange sold separately.

Recommended Products/Accessories

K-7397 Shower Arm and Flange
K-23723 Faucet cleaner



Codes/Standards




ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992
EPA WaterSense®


KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	SN	Vibrant® Polished Nickel
	PB	Vibrant® Polished Brass

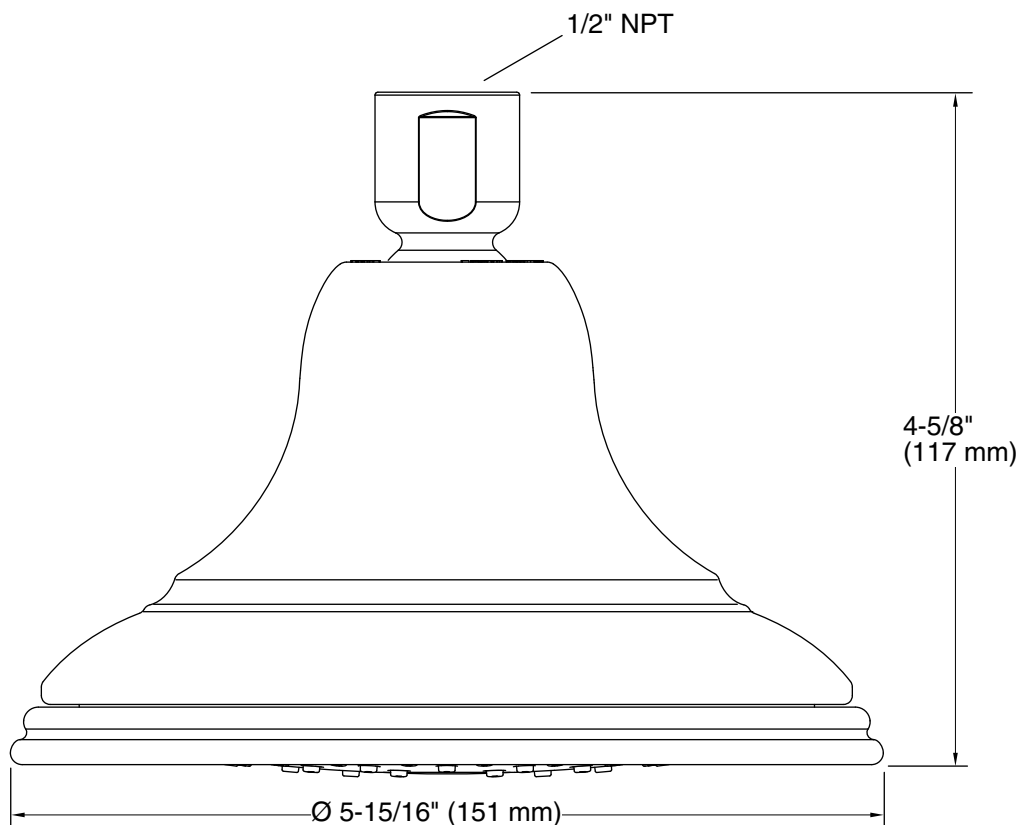

Technical Information

All product dimensions are nominal.

Showerhead/Body Spray:

Rated maximum flow: 2 gal/min (7.6 l/min)

Pressure: 80 psi (5.5 bar)

Notes

For use with automatic compensating valves rated at 1.7 gal/min (6.4 l/min) or less.

Install this product according to the installation guide.