

## Torsion® 60" LH Sliding Door K-706108-L

## Technology

- Frameless, 5/16-inch-thick (8mm) Crystal Clear tempered glass.
- Left-hand door slides open; fixed panel on right.
- 11-inch geometric handle on both sides of the glass has a solid, heavy feel.
- Ultra-low threshold (9/16-inch) for easy entry and exit.
- Seals provide excellent water containment.
- Door catch closes door securely.
- CleanCoat® nanotechnology helps prevent bacteria, mildew and water stains on your glass, making it easy to clean and looking new.
- No exposed screws for a sleek, contemporary look.
- Available in Bright Polished Silver (SHP) finish.
- Includes K-706108-FL-SHP fixed sliding door and K-706108-ML-SHP moving sliding door (ships separately).

#### Installation

- Sliding shower door.
- Pre-assembled frame requires no cutting during installation.
- 3/4-inch width adjustability on each wall jamb, offering 1-1/2-inch total adjustability.
- Roller system adjustability for out-of-plumb fine-tuning.
- Not for use in hospitality.
- For residential use only.

### **Recommended Products/Accessories**

1296808 Torsion™ Door Filler Jamb

#### **Included Components**

Additional Components:

Hardware kit



### Codes/Standards

ANSI Z97.1 CPSC 16CFR 1201

## **KOHLER® One-Year Limited Warranty**

See website for detailed warranty information.

#### Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description

SHP


Available Glass Options
Code Description

L Crystal Clear





# Torsion® 60" LH Sliding Door K-706108-L

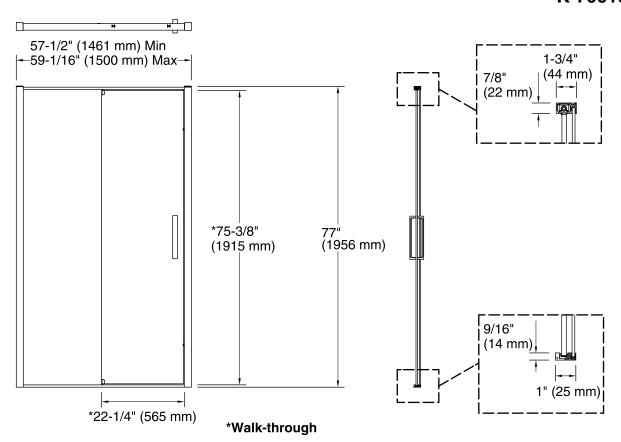

## **Technical Information**

All product dimensions are nominal.

Installation type: For shower base installation

Opening Width - Min: 57-1/2" (1460 mm)
Opening Width - Max: 59-1/16" (1500 mm)
Walk-through - Min: 22-1/4" (565 mm)
Walk-through - Max: 22-1/4" (565 mm)
Glass thickness: 5/16" (8 mm)
Glass coating: CleanCoat®

#### **Notes**

Install this product according to the installation guide.

The vertical opening should be a minimum of 80" (2032 mm) to allow for installation clearance.

