KOHLER_®

Technology

- Frameless, 5/16-inch-thick (8mm) Crystal Clear tempered glass.
- Right-hand door slides open; fixed panel on left.
- 11-inch geometric handle on both sides of the glass has a solid, heavy feel.
- Ultra-low threshold (9/16-inch) for easy entry and exit.
- Seals provide excellent water containment.
- Door catch closes door securely.
- CleanCoat[®] nanotechnology helps prevent bacteria, mildew and water stains on your glass, making it easy to clean and looking new.
- No exposed screws for a sleek, contemporary look.
- Available in Bright Polished Silver (SHP) finish.
- Includes K-706109-FL-SHP fixed sliding door and K-706109-ML-SHP moving sliding door (ships separately).

Installation

- Sliding shower door.
- Pre-assembled frame requires no cutting during installation.
- 3/4-inch width adjustability on each wall jamb, offering 1-1/2-inch total adjustability.
- Roller system adjustability for out-of-plumb fine-tuning.
- Not for use in hospitality.
- For residential use only.

Recommended Products/Accessories 1296808 Torsion[™] Door Filler Jamb

Included Components

Additional Components: Hardware kit



Codes/Standards

ANSI Z97.1 CPSC 16CFR 1201

KOHLER[®] One-Year Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description

SHP


Available Glass Options Code Description

L Crystal Clear



Torsion® 60" RH Sliding Door **K-706109-L**



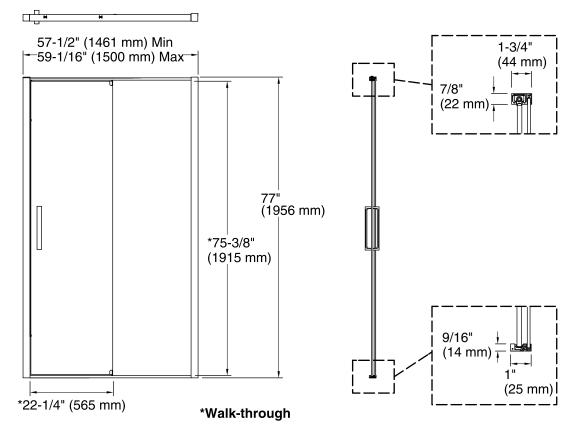

Technical Information

All product dimensions are nominal.

Installation type:For shower base installationOpening Width - Min:57-1/2" (1460 mm)Opening Width - Max:59-1/16" (1500 mm)Walk-through - Min:22-1/4" (565 mm)Walk-through - Max:22-1/4" (565 mm)Glass thickness:5/16" (8 mm)Glass coating:CleanCoat®

Notes

Install this product according to the installation guide.

The vertical opening should be a minimum of 80" (2032 mm) to allow for installation clearance.

