KOHLER Faucets

HydroRail®-S Shower Column Kit K-76471

Features

- Advanced spray engine provides three alternate experiences: wide coverage, intense drenching, and targeted spray.
- Wide-coverage spray produces an encompassing spray for everyday use.
- Intense drenching spray delivers a forceful spray ideal for rinsing shampoo from hair.
- Targeted spray is a focused stream for targeting sore muscles or use as a utility spray.
- Simple thumb tab smoothly transitions between sprays.
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup.
- 2.0 gpm (gallons per minute) showerhead and handshower flow rate.
- Slidebar bracket allows you to adjust height and angle of handheld shower head.
- Diverter at the base of the column makes for easy toggling between handshower and showerhead.

Installation

- Wall-mount.
- For use in shower-only installations.
- Installs in less than 60 minutes without changes to in-wall plumbing (subject to condition of existing installation).
- May require additional service parts based on installation type (see installation guide for details).
- Includes an adapter that will fit with most installations but may require K-1194630, K-1187917 or K-1194302.

Recommended Products/Accessories

K-23723 Faucet cleaner

Included Components

Product consists of:

K-72415 Multifunction Handshower

K-45982 60" ribbon hose

K-45906 Shower column

K-72419 Multifunction Showerhead



ADA

OBC

Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992 ADA ICC/ANSI A117.1 OBC

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes


Color tiles intended for reference only.

Color	Code	Description
	СР	Polished Chrome
	BN	Vibrant® Brushed Nickel
	BI	Matte Black



KOHLER, Faucets

HydroRail®-S Shower Column Kit K-76471

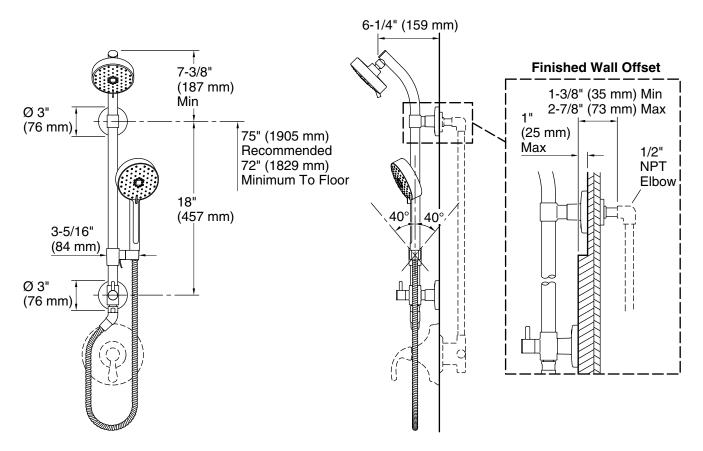

Technical Information

All product dimensions are nominal.

Handshower:

Rated maximum 2 gal/min (7.6 l/min)

flow:

Pressure: 45 psi (3.1 bar)

Showerhead/Body Spray:

Rated maximum 2 gal/min (7.6 l/min)

flow:

Pressure: 45 psi (3.1 bar)

Notes

Install this product according to the installation guide.

IMPORTANT! The slidebar must be mounted to stud framing at both the top and bottom mounting locations. Do not use or depend on plastic wall anchors to attach the slidebar.

Plumbing codes may require that an atmospheric vacuum breaker be installed in-line to handshowers. Consult with local codes.

ADA, OBC compliant when installed to the specific requirements of these regulations.

