MOEN

Buy it for looks. Buy it for life.®

Specifications

DESCRIPTION

- Metal construction with chrome plated, LifeShine[®] brushed nickel, chrome w/porcelain, chrome w/LifeShine[®] polished brass, satine, or satine w/ LifeShine polished brass accents
 1/2[®] IPS connections
- Includes metal pop-up waste assembly
- Includes hot (red) and cold (blue) temperature indicators

OPERATION

- Lever style handles
- Maximum handle rotation angle is 90° to full on for either handle. Rotate Hot side, counterclocwise to open (clockwise to close). Rotate Cold side, clockwise to open (counterclockwise to close)

FLOW

Aerator is limited to 2.2 gpm (8.3 L/min)

CARTRIDGE

- 1224 cartridge design
- Nonmetallic and stainless steel material

STANDARDS

- Third party certified to meet CSA B-125, ASME A112.18.1M and all applicable requirements referenced therein
- Certified to ANSI/NSF 61/9
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations




CASTELBY[™] Two-Handle Mini-Widespread Lavatory Faucet

Models: T4945, T4945BN, T4945CP, T4945CPC, T4945ST, T4945STST

Valve: 9300, 69300

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 3 HOLES, 1-1/8" (29mm) MIN. DIA.

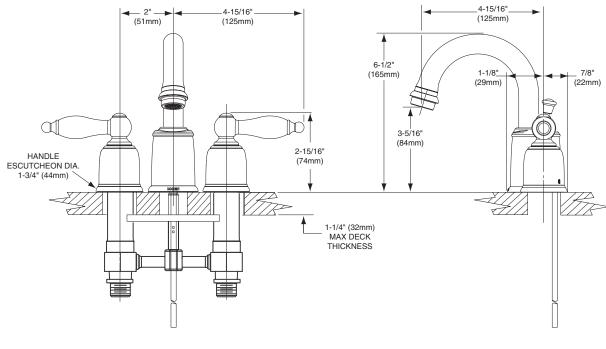

CRITICAL DIMENSIONS

(DO NOT SCALE)