


# Angle Sillcock Valves

125 lb. CWP to 100 ° F


Maximum Temperature 180 ° F

CSA B125 Approved and IAPMO Listed

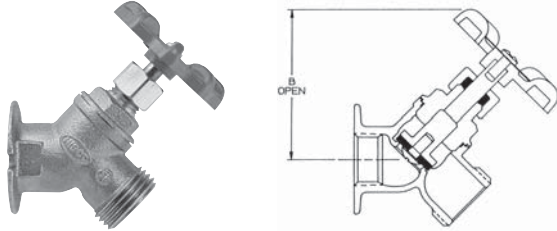


## 63-CL

DESCRIPTION	NOM. SIZE	DIMENSIONS		APPROX. NET WT.
		B		
Angle Sillcock FIP to Hose	1/2"	2 1/2"		.50 lb
	3/4"	2 1/2"		.53 lb

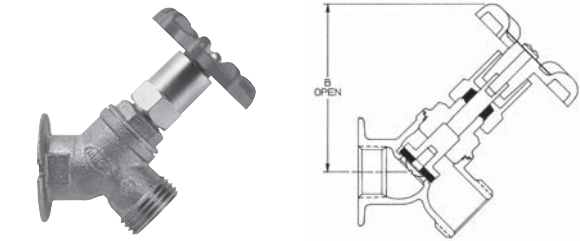


## 63-CL-LS

DESCRIPTION	NOM. SIZE	DIMENSIONS		APPROX. NET WT.
		B		
Angle Sillcock FIP to Hose with Lockshield	1/2"	2 13/16"		.60 LB
	3/4"	2 13/16"		.64 LB

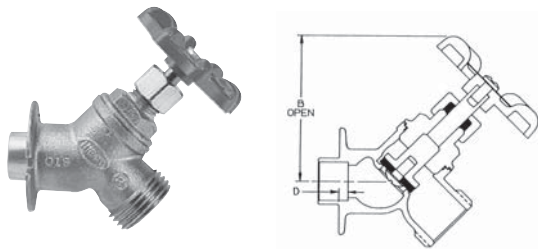


## 763-CL

DESCRIPTION	NOM. SIZE	DIMENSIONS		APPROX. NET WT.
		B	D	
Angle Sillcock Cup to Hose	1/2"	2 13/16"	5/32"	.53 lb
	3/4"	2 13/16"	9/32"	.57 lb

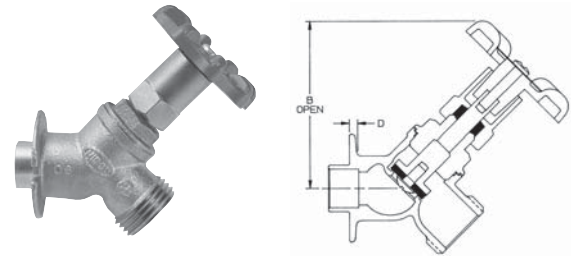

## 763-CL-LS

DESCRIPTION	NOM. SIZE	DIMENSIONS		APPROX. NET WT.
		B	D	
Angle Sillcock Cup to Hose with Lockshield	1/2"	2 13/16"	5/32"	.63 lb
	3/4"	2 13/16"	9/32"	.67 lb

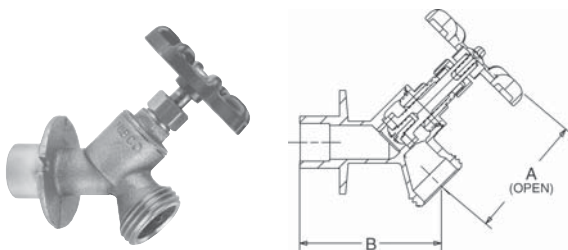

## C763-1±

DESCRIPTION	NOM. SIZE	DIMENSIONS		APPROX. NET WT.
		A	B	
Angle Sillcock 1/2" or 3/4" Fitting to Cup	1/2" or 3/4"	2 7/16"	2 1/4"	.4 lb

± - Not CSA approved or IAPMO listed

