

CUSHION CLAMP ASSEMBLIES




FS-1400 SERIES HYDRA-ZORB CUSHION CLAMPS

Copper &

Part No	•	CT Size	Steel Tube O.D. Size
FS-140	0-025	1/8"	1/4"
FS-140	0-037	1/4"	3/8"
FS-140	0-050	3/8"	1/2"
FS-140	0-062	1/2"	5/8"
FS-140	0-075	5/8"	3/4"
FS-140	0-087	3/4"	7/8"
FS-140	0-112	1"	1-1/8"
FS-140	0-137	1-1/4"	1-3/8"
FS-140	0-162	1-1/2"	1-5/8"
FS-140	0-212	2"	2-1/8"
FS-140	0-262	2-1/2"	2-5/8"
FS-140	0-312	3"	3-1/8"
FS-140	0-362	3-1/2"	3-5/8"
FS-140	0-412 Contact Fact		4-1/8" ional Sizes

Part No.	Nom. Pipe Size	Part No.	Nom. Pipe Size	
FS-1400P-025.	1/4"	FS-1400P-200	2"	
FS-1400P-037.	3/8"	FS-1400P-250	.2-1/2"	
FS-1400P-050.	1/2"	FS-1400P-300	3"	
FS-1400P-075.	3/4"	FS-1400P-350	.3-1/2"	
FS-1400P-100.	1"	FS-1400P-400	4"	
FS-1400P-125.	1-1/4"	FS-1400P-500	5"	
FS-1400P-150.	1-1/2"	FS-1400P-600.	6"	
Contact Factory For Additional Sizes				

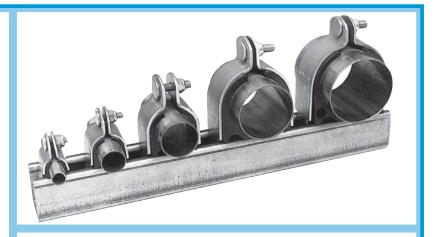

HYDRA-ZORB CUSHION CLAMP ASSEMBLIES FOR PIPES, TUBES, AND HOSES.

- Reduce noise, shock and vibration caused by fluid surges in tubes, pipes, and hoses used in the construction of stationery and mobile equipment.
- Eliminate metal to metal contact between fluid conductors and clamps.
- · Resist most fuels, oils, gases, greases, solvents, mineral acids, etc.
- Allow fluid conductors to be added or removed from installations without disturbing adjacent conductors.
- Permit various fluid conductors to be mixed to suit installation.
- Allow center distances between fluid conductors to be variable and not critical for compact installation.
- Are usable to temperatures down to -65°F and up to 275°F.
- Provide fast and simple installation. Only one man and one tool needed for assembly after base channel is in place.

Standard Finish – electro-galvanized with yellow chromate rinse *Also available in stainless steel, 304 or 316, aluminum and hot dip galvanized.*



FLEX-WRAP - FS-3792



(800) **FX-STRUT**