




Specification: SureSeal model SS3509V Waterless In-line 3.5" Drain Trap Seal. HDPE (High Density Poly Ethylene) housing with proprietary EPDM rubber diaphragm and soft rubber sealing gasket. Floor rating ASSE 1072 AF GW.

Function: Installed into drain strainers or drain hubs to protect the trap seal from evaporation. Creates a physical barrier that blocks sewer gases and their odors from escaping. Provides waterless trap seal protection equivalent to water based trap primers.

- · New Construction: Used as a trap primer replacement or in conjunction with a trap primer to provide protection against escaping sewer gases. Eliminates the need to repair/replace trap primers when they fail.
- · Retrofit: Used in situations where trap primers have failed or where trap primers were never installed.


Benefits: Simple to install, eliminates the need for complex, time consuming, and expensive repairs. ECO friendly providing 100% water savings efficiency over traditional methods.

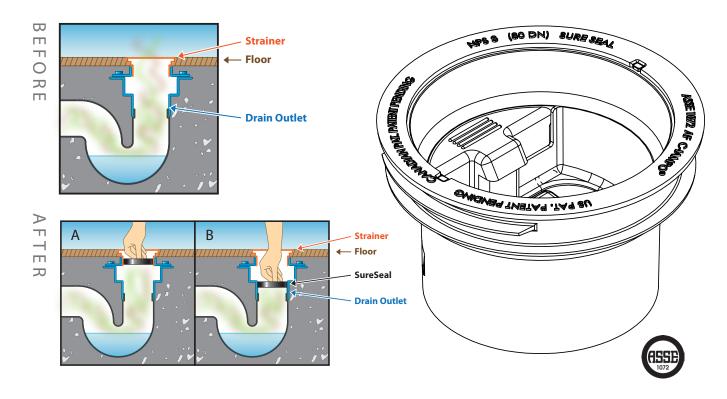

ICC-ES Listed: PMG-1070 IAPMO Listed: C-4165

U.S. Patent 9,010363

Other Patent Pending

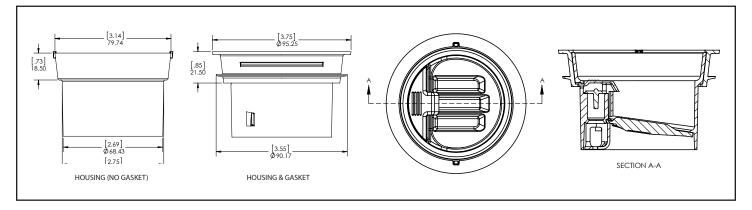



Contact: RectorSeal® 2601 Spenwick Drive, Houston, TX 77055 P 713-263-8001 800-231-3345 D 713-263-7577 800-441-0051 W rectorseal.com