
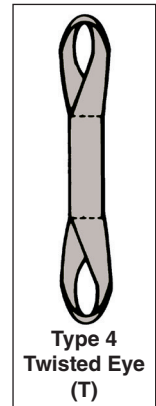


TUFF-EDGE® III & WEBMASTER® 1600 POLYESTER SLINGS

Web Slings

EYE / EYE SLINGS						
Ply	Tuff-Edge III Part No.**	Web Width (i n.)	Rated Capacity* (lbs.)			Webmaster 1600 Part No.***
			Vertical	Choker	V. Basket	
One Ply	EE1801TF	1	1,600	1,280	3,200	EE1801DF
	EE1802TF	2	3,200	2,500	6,400	EE1802DF
	EE1803TF	3	4,800	3,800	9,600	EE1803DF
	EE1804TF	4	6,400	5,000	12,800	EE1804DF
	EE1806TF	6	9,600	7,700	19,200	EE1806DF
	EE1808TF	8	12,800	10,200	25,600	EE1808DF
	EE1810TF	10	16,000	12,800	32,000	EE1810DF
	EE1812TF	12	19,200	15,400	38,400	EE1812DF
Two Ply	EE2801TF	1	3,200	2,500	6,400	EE2801DF
	EE2802TF	2	6,400	5,000	12,800	EE2802DF
	EE2803TF	3	8,800	7,040	17,600	EE2803DF
	EE2804TF	4	11,500	9,200	23,000	EE2804DF
	EE2806TF	6	16,500	13,200	33,000	EE2806DF
	EE2808TF	8	19,200	15,400	38,400	EE2808DF
	EE2810TF	10	22,400	17,900	44,800	EE2810DF
	EE2812TF	12	26,900	21,500	53,800	EE2812DF
Three Ply	EE3801TF	1	4,100	3,300	8,200	EE3801DF
	EE3802TF	2	8,300	6,600	16,600	EE3802DF
	EE3803TF	3	12,500	10,000	25,000	EE3803DF
	EE3804TF	4	16,000	12,800	32,000	EE3804DF
	EE3806TF	6	23,000	18,400	46,000	EE3806DF
	EE3808TF	8	30,700	24,500	61,400	EE3808DF
	EE3810TF	10	36,800	29,400	73,600	EE3810DF
	EE3812TF	12	44,000	35,200	88,000	EE3812DF
Four Ply	EE4801TF	1	5,000	4,000	10,000	EE4801DF
	EE4802TF	2	10,000	8,000	20,000	EE4802DF
	EE4803TF	3	14,900	11,900	29,800	EE4803DF
	EE4804TF	4	19,800	15,800	39,600	EE4804DF
	EE4806TF	6	29,800	23,800	59,600	EE4806DF
	EE4808TF	8	39,700	31,700	79,400	EE4808DF
	EE4810TF	10	49,600	39,600	99,200	EE4810DF
	EE4812TF	12	59,500	47,600	119,000	EE4812DF

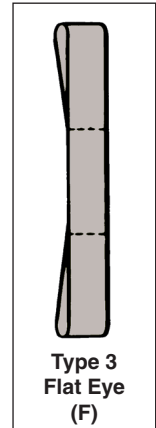

** Replace the "F" with a "T" for Twisted Eyes (Type 4). *** Replace the "D" with an "N" to order nylon. Eyes on Type 3 and Type 4 slings are tapered at 3" and wider, unless otherwise specified.

EYE LENGTH – APPLIES TO ALL SLINGS								
Plies of Web	Sling Width (in.)							
	1	2	3	4	6	8	10	12
1	8.5	10	11	12	16	20	24	24
2	8.5	10	11	12	16	20	24	24
3	10.0	12	14	16	18	24	24	24
4	10.0	12	14	16	18	24	24	24

* **WARNING** Do not exceed rated capacities. Sling tension increases as the angle from horizontal decreases. Slings should not be used at angles of less than 30°. Refer to the Effect of Angle chart in the General Information section of this catalog.

SYNTHETIC WEB BRIDLE SLINGS



Web Slings

Web Bridle Slings											
Part No. For Web Sling Legs	Web Width (in.)	Web Plies	Number of Legs	Rated Capacity* (lbs.)						Alloy Sling Hook	Oblong Link
				Vertical	Choke	Basket	60°	45°	30°	Size	Dia. (in.)
EE1801*	1	1	Single	1,600	1,280	3,200	–	–	–	1-Ton Alloy	1/2
	1	1	Double	–	–	–	2,700	2,200	1,600	1-Ton Alloy	1/2
	1	1	Triple	–	–	–	4,100	3,300	2,400	1-Ton Alloy	3/4
	1	1	Quad	–	–	–	5,500	4,500	3,200	1-Ton Alloy	1
EE2801*	1	2	Single	3,000	2,400	6,000	–	–	–	1-1/2 Ton Alloy	1/2
	1	2	Double	–	–	–	5,100	4,200	3,000	1-1/2 Ton Alloy	3/4
	1	2	Triple	–	–	–	7,700	6,300	4,500	1-1/2 Ton Alloy	3/4
	1	2	Quad	–	–	–	10,300	8,400	6,000	1-1/2 Ton Alloy	1
EE1802*	2	1	Single	3,000	2,400	6,000	–	–	–	1-1/2 Ton Alloy	1/2
	2	1	Double	–	–	–	5,100	4,200	3,000	1-1/2 Ton Alloy	3/4
	2	1	Triple	–	–	–	7,700	6,300	4,500	1-1/2 Ton Alloy	3/4
	2	1	Quad	–	–	–	10,300	8,400	6,000	1-1/2 Ton Alloy	1
EE2802*	2	2	Single	6,000	4,800	12,000	–	–	–	3-Ton Alloy	3/4
	2	2	Double	–	–	–	10,300	8,400	6,000	3-Ton Alloy	1
	2	2	Triple	–	–	–	15,500	12,700	9,000	3-Ton Alloy	1
	2	2	Quad	–	–	–	20,700	16,900	12,000	3-Ton Alloy	1-1/4

Note: Hardware capacities correspond to the appropriate sling capacities. See hardware dimensions in Rigging Hardware section in this catalog. Import hooks with latches are standard. Contact Lift-All for domestic hook and latch options.

*



WARNING

Do not exceed rated capacities. Sling tension increases as the angle from horizontal decreases. Slings should not be used at angles of less than 30°. Refer to the Effect of Angle chart in the General Information section of this catalog.