

SUPPLY



DRAINAGE



SUPPORT



APPENDIX

## Mini-Rester™

### Residential Water Hammer Arrester PEX Tee


- Great for in-line PEX installation for quick closing faucets
- ASTM F1807 PEX Tee †
- ASTM F1960 PEX Tee †
- ASTM F2080 PEX Tee †

### Compression Tee

- Install in-line on ice maker lines, lav or dishwasher supply tubes

### Female Compression Tee

- Installs either between stub out and supply stop, or between supply stop and supply tube for faucets, dishwashers, toilets or ice makers

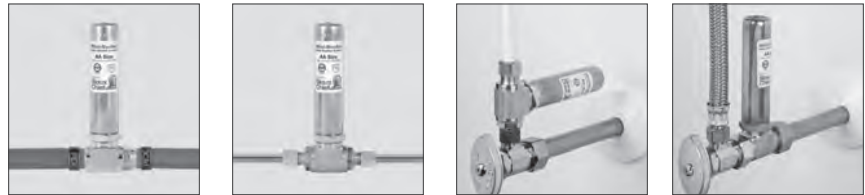

Item No	Description	<b>NO LEAD</b>	Pkg	Min Qty	Case Qty
<b>PEX TEE</b>					
660-TW2	1/2" PEX cold expansion tee F1960		B	25	25
660-TX1B	3/8" PEX crimp tee F1807		B	25	25
660-TX1	3/8" PEX crimp tee F1807, clamshell		C*	6	6
660-TX2B	1/2" PEX crimp tee F1807		B	25	25
660-TX2	1/2" PEX crimp tee F1807, clamshell		C*	6	6
660-TA2B	1/2" PEX cold expansion tee F2080		B	1	25
<b>COMPRESSION TEE</b>					
660-TC0B	1/4" O.D. compression tee for ice maker tube		B	25	25
660-TC0	1/4" O.D. compression tee for ice maker tube, clamshell		C*	6	6
660-TC1B	3/8" O.D. compression tee for supply tube		B	25	25
660-TC1	3/8" O.D. compression tee for supply tube, clamshell		C*	6	6
660-TB	5/8" O.D. compression tee for 1/2" nom. copper tube		B	25	25
660-T	5/8" O.D. compression tee for 1/2" nom. copper tube, clamshell		C*	6	6
660-GT	5/8" O.D. compression tee, no lead for 1/2" nom. copper tube, clamshell	✓	C*	6	6
660-GTB	5/8" O.D. compression tee, no lead for 1/2" nom. copper tube, bulk	✓	B	25	25
<b>FEMALE COMPRESSION TEE</b>					
660-TROB	1/4" O.D. comp. × 1/4" O.D. female comp.		B	25	25
660-TRO	1/4" O.D. comp. × 1/4" O.D. female comp., clamshell		C*	1	6
660-TR1B	3/8" O.D. comp. × 3/8" O.D. female comp.		B	25	25
660-TR1	3/8" O.D. comp. × 3/8" O.D. female comp., clamshell		C*	6	6
660-GTR1B	3/8" O.D. comp. × 3/8" O.D. female comp. no lead	✓	B	25	25
660-GTR1	3/8" O.D. comp. × 3/8" O.D. female comp. no lead, clamshell	✓	C*	6	6
660-TRB	5/8" O.D. comp. × 5/8" O.D. female comp.		B	25	25
660-TR	5/8" O.D. comp. × 5/8" O.D. female comp., clamshell		C*	6	6
660-GTRB	5/8" O.D. comp. × 5/8" O.D. female comp. no lead	✓	B	25	25
660-GTR	5/8" O.D. comp. × 5/8" O.D. female comp. no lead, clamshell	✓	C*	6	6

† Note on ASTM PEX Fitting Standards:

ASTM F1807: PEX Barb Insert Fittings

Utilizing a Copper Crimp Ring.

ASTM F1960: PEX Cold Expansion Fittings

Utilizing a PEX Compression Ring.

ASTM F2080: PEX Cold Expansion Fittings

Utilizing a Metal Compression Ring.