




## 1/4" DRIVE UNIVERSAL SOCKETS

- ▶ PROTO® Sockets with TorquePlus™ are ideal for use on stubborn or damaged fasteners, and also on fasteners made from soft materials.
- ▶ Full polish sockets meet and exceed stringent aerospace specification AS4984A which requires tools to have a thicker nickel-chrome coating for greater corrosion-resistance and durability.



- ▶ Radius-corner socket design
- ▶ Engages flats for better grip
- ▶ Improves the ability to turn worn or rounded fasteners

1/4" DRIVE SOCKETS

INCH	6	12	Nut End Outside Diameter (in) (B)	Drive End Outside Diameter (in) (C)	Nut Depth (in) (D)	Bolt Clearance Depth (in) (E)	Overall Length (in) (L)	Weight (lbs)
7/32	-	<b>J4770TA</b>	11/32	1/2	9/32	3/8	1-1/4	0.05
1/4	<b>J4771A</b>	<b>J4771TA*</b>	3/8	1/2	9/32	3/8	1-1/4	0.05
9/32	-	<b>J4777TA</b>	7/16	1/2	9/32	3/8	1-1/4	0.06
5/16	<b>J4772A</b>	<b>J4772TA*</b>	15/32	1/2	9/32	3/8	1-1/4	0.04
11/32	-	<b>J4778TA</b>	1/2	1/2	9/32	3/8	1-1/4	0.05
3/8	<b>J4773A</b>	<b>J4773TA*</b>	9/16	1/2	9/32	3/8	1-1/4	0.04
7/16	<b>J4774A</b>	<b>J4774TA*</b>	5/8	1/2	9/32	3/8	1-1/4	0.05
1/2	-	<b>J4775TA*</b>	11/16	1/2	9/32	3/8	1-1/4	0.05
9/16	-	<b>J4776TA</b>	3/4	1/2	23/64	29/64	1-21/64	0.07


\*SAE AS955 ASME B107.110-2012

MM	6	Nut End Outside Diameter (in) (B)	Drive End Outside Diameter (in) (C)	Nut Depth (in) (D)	Bolt Clearance Depth (in) (E)	Overall Length (in) (L)	Weight (lbs)
5	<b>J4805AM</b>	5/16	31/64	9/32	11/32	1-1/4	0.03
5.5	<b>J48055AM</b>	21/64	31/64	9/32	11/32	1-1/4	0.04
6	<b>J4806AM</b>	11/32	31/64	9/32	11/32	1-1/4	0.04
7	<b>J4807AM</b>	13/32	31/64	9/32	11/32	1-1/4	0.04
8	<b>J4808AM</b>	29/64	31/64	9/32	11/32	1-1/4	0.03
9	<b>J4809AM</b>	1/2	31/64	9/32	11/32	1-1/4	0.04
10	<b>J4810AM</b>	35/64	31/64	9/32	11/32	1-1/4	0.04
11	<b>J4811AM</b>	19/32	31/64	9/32	11/32	1-1/4	0.05
12	<b>J4812AM</b>	21/32	31/64	9/32	11/32	1-1/4	0.04
13	<b>J4813AM</b>	45/64	31/64	19/64	11/32	1-1/4	0.05
14	<b>J4814AM</b>	47/64	31/64	23/64	27/64	1-21/64	0.05
15	<b>J4815AM</b>	51/64	31/64	23/64	27/64	1-21/64	0.05

## INTERMEDIATE SOCKETS

PROTO® intermediate sockets feature increased Nut Depth and Bolt Clearance vs. standard length sockets. This gives PROTO® intermediate sockets versatility in tight spaces.

A - Nut Depth      B - Bolt Clearance

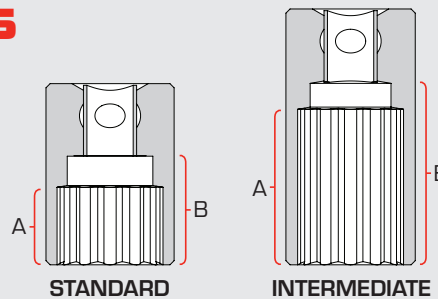

6 POINT   
 8 POINT   
 12 POINT   
 SPLINE   
 HEX   
 FULL POLISH   
 SATIN   
 BLACK OXIDE   
 INSULATED