



3/8" DRIVE SOCKETS - SPLINE

- Full polish sockets meet and exceed stringent aerospace specification AS4984A which requires tools to have a thicker nickel-chrome coating for greater corrosion-resistance and durability.

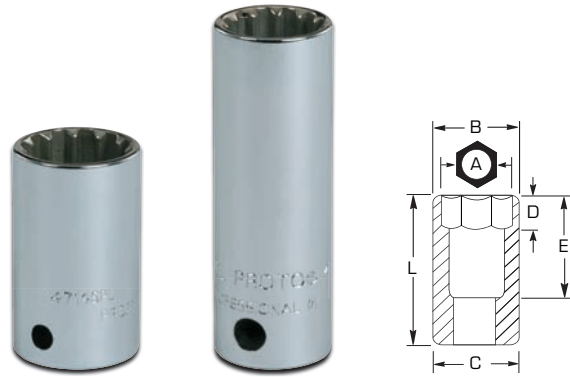


STANDARD

| INCH | Spline Size |  | Nut End Outside Diameter (in) (B) | Drive End Outside Diameter (in) (C) | Nut Depth (in) (D) | Bolt Clearance Depth (in) (E) | Overall Length (in) (L) | Weight (lbs) |
|------|-------------|---|-----------------------------------|-------------------------------------|--------------------|-------------------------------|-------------------------|--------------|
| 3/8 | 12 | J5212SPL | 9/16 | 21/32 | 3/8 | 11/16 | 1 | 0.06 |
| 7/16 | 14 | J5214SPL | 5/8 | 11/16 | 7/16 | 3/4 | 1-1/16 | 0.06 |
| 1/2 | 16 | J5216SPL | 3/4 | 23/32 | 7/16 | 3/4 | 1-1/16 | 0.07 |
| 9/16 | 18 | J5218SPL | 13/16 | 13/16 | 15/32 | 3/4 | 1-1/16 | 0.01 |
| 5/8 | 20 | J5220SPL | 7/8 | 7/8 | 17/32 | 7/8 | 1-3/16 | 0.13 |



DEEP

| INCH | Spline Size |  | Nut End Outside Diameter (in) (B) | Drive End Outside Diameter (in) (C) | Nut Depth (in) (D) | Bolt Clearance Depth (in) (E) | Overall Length (in) (L) | Weight (lbs) |
|------|-------------|---|-----------------------------------|-------------------------------------|--------------------|-------------------------------|-------------------------|--------------|
| 3/8 | 12 | J5012DPL | 9/16 | 21/32 | 3/8 | 1-5/8 | 2-1/8 | 0.08 |
| 7/16 | 14 | J5014DPL | 5/8 | 11/16 | 7/16 | 1-5/8 | 2-1/8 | 0.10 |
| 1/2 | 16 | J5016DPL | 3/4 | 23/32 | 7/16 | 1-5/8 | 2-1/8 | 0.12 |
| 9/16 | 18 | J5018DPL | 13/16 | 13/16 | 15/32 | 1-7/8 | 2-3/8 | 0.19 |
| 5/8 | 20 | J5020DPL | 7/8 | 7/8 | 17/32 | 1-7/8 | 2-3/8 | 0.22 |

