

# Pramed sliding shower door 5960-44

#### **Features**

- Framed, 1/8" (3 mm) thick tempered glass.
- Towel bar.
- Tempered glass ensures enhanced safety and durability.

#### Material

Anodized aluminum prevents rust and corrosion.

### Installation

- Out-of-plumb adjustability simplifies installation.
- Not for use in hospitality.
- For residential use only.

# **Recommended Products/Accessories**

K-23723 Faucet cleaner

### **Included Components**

Additional Components: Hardware kit



## Codes/Standards

ANSI Z97.1 CPSC 16CFR 1201

# STERLING® Warranty - Bath and Shower Doors

See website for detailed warranty information.

## **Available Colors/Finishes**

Color tiles intended for reference only.

**Color Code Description** 


S Silver

Available Glass Options
Code Description

Pebbled



# Pramed sliding shower door 5960-44

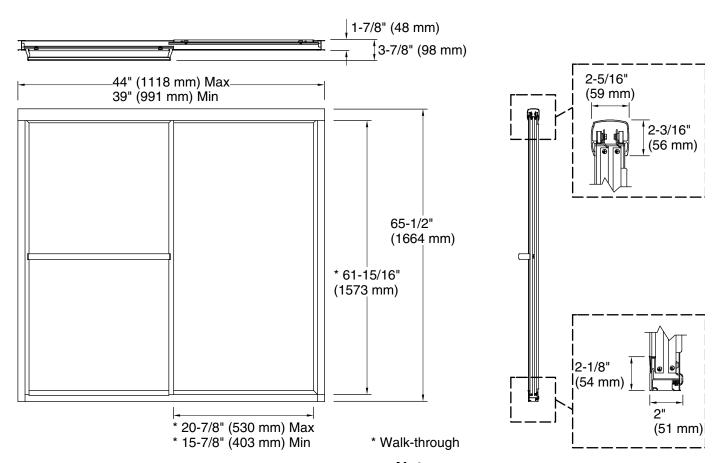

#### **Technical Information**

All product dimensions are nominal.

Installation type: For shower base installation

Opening Width -

39" (991 mm)

Min:

Opening Width - 44" (1118 mm)

Max:

Walk-through - Min: 15-7/8" (403 mm)
Walk-through - Max: 20-7/8" (530 mm)
Base-To-Wall 1/2" (13 mm)

Radius - Max:

Glass thickness: 1/8" (3 mm)

#### **Notes**

Install this product according to the installation guide.

The vertical opening should be a minimum of 66-15/16" (1700 mm) to allow for installation clearance.