

Deluxe

Framed sliding shower door 5960-57

Features

- Framed, 1/8" (3 mm) thick tempered glass.
- Towel bar.
- Tempered glass ensures enhanced safety and durability.

Material

Anodized aluminum prevents rust and corrosion.

Installation

- Out-of-plumb adjustability simplifies installation.
- Not for use in hospitality.
- For residential use only.

Recommended Products/Accessories

K-23723 Faucet cleaner

Included Components

Additional Components: Hardware kit



Codes/Standards

ANSI Z97.1 CPSC 16CFR 1201

STERLING® Warranty - Bath and Shower Doors

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description

S Silver


Available Glass Options

Code Description

Pebbled



Pramed sliding shower door 5960-57

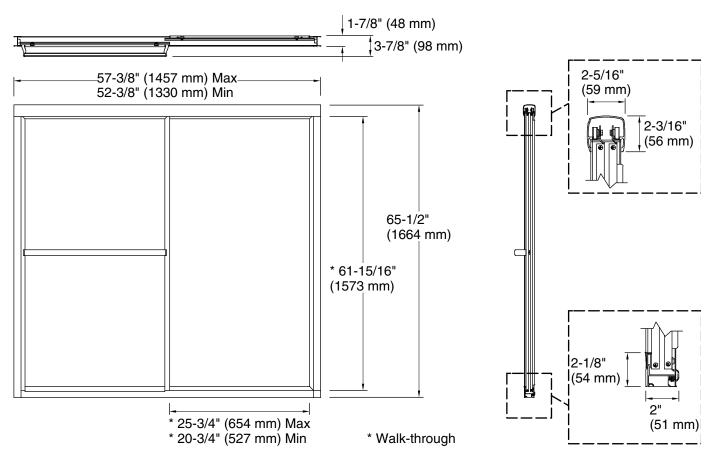

Technical Information

All product dimensions are nominal.

Installation type: For shower base installation

Opening Width -

52-3/4" (1340 mm)

Min:

Opening Width - 57-3/4" (1467 mm)

Max:

Walk-through - Min: 22-3/4" (578 mm)
Walk-through - Max: 27-3/4" (705 mm)
Base-To-Wall 1/2" (13 mm)

Radius - Max:

Glass thickness: 1/8" (3 mm)

Notes

Install this product according to the installation guide.

The vertical opening should be a minimum of 66-15/16" (1700 mm) to allow for installation clearance.

1-800-STERLING (1-800-783-7546)