

## Deluxe

Framed sliding shower door 5976-48

#### Features

- Framed, 1/8" (3 mm) thick tempered glass.
- Towel bar.
- Out-of-plumb adjustability.
- Tempered glass ensures maximum safety and durability.
- Anodized aluminum prevents rusting and corrosion.

#### Installation

- Not for use in hospitality.
- For residential use only.

### **Recommended Products/Accessories**

K-23723 Faucet cleaner

#### **Included Components**

Additional Components: Hardware kit



Codes/Standards ANSI Z97.1 CPSC 16CFR 1201

# STERLING<sup>®</sup> Warranty - Bath and Shower Doors

See website for detailed warranty information.

#### **Available Colors/Finishes**

Color tiles intended for reference only.


Color Code Description


S Silver

Available Glass Options Code Description

Rain





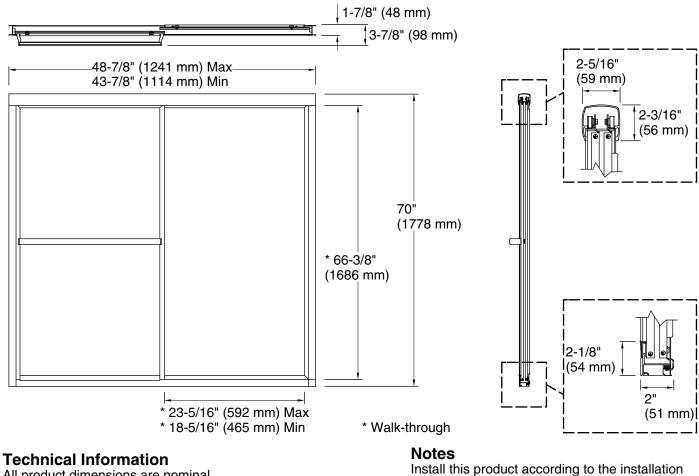

All product dimensions are nominal.

Installation type: For shower base installation Opening Width - Min: 43-7/8" (1114 mm) Opening Width - Max: 48-7/8" (1241 mm) Walk-through - Min: 18-5/16" (465 mm) Walk-through - Max: 23-5/16" (592 mm) Base-To-Wall Radius 1/2" (13 mm) – Max: Glass thickness: 1/8" (3 mm)

guide.

The vertical opening should be a minimum of 71-3/8" (1813 mm) to allow for installation clearance.