



A KOHLER COMPANY

**Accord®**

60" x 30" Bath with Backer Board  
**71141116**



**Features**

- Durable high gloss finish.
- 15" (381mm) bath depth (floor to top of threshold).
- Includes backer board for future seat installation.
- 60" (1524 mm) x 30" (762 mm) complete unit finished dimensions.

**Material**


- Compression molded from our exclusive solid Vikrell® material.

**Installation**

- Bath only installation not recommended. Install bath with STERLING wall set.

**Recommended Accessories**

- 500C-59 Framed Sliding Bath Door
- 690B-59 Framed Sliding Bath Door
- 5325EZ-57 Frameless Sliding Bath Door
- 5425-57 Frameless Sliding Bath Door
- 5425-59 Frameless Sliding Bath Door
- 5905-59 Framed Sliding Bath Door
- 5906-59 Framed Sliding Bath Door
- 5907-59 Framed Sliding Bath Door
- 542808-59 Frameless Sliding Bath Door
- 572005-59 Framed Sliding Bath Door
- 581005-59 Frameless Sliding Bath Door
- 80001012 12" Grab Bar
- 80001018 18" Grab Bar
- 80001024 24" Grab Bar
- 80011032 32" Grab Bar
- 80001036 36" Grab Bar
- VA-80172 Window Trim Kit
- 71147103 ADA Adaptable Grab Bar Kit
- 71147104 30" Bath Seat Kit

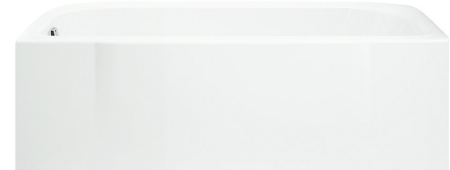

**Codes/Standards**



- CSA B45.5/IAPMO Z124
- ASTM E162
- ASTM E662
- Greenguard UL 2818 - Gold

**Warranty – Bathing Fixtures (and Kitchen and Utility Sinks Made of Solid Vikrell® Material)**

See website for detailed warranty information.

**Available Color/Finishes**

*Color tiles intended for reference only.*

Color	Code	Description
	0	White
	96	KOHLER Biscuit

USA/Canada: 1-800-STERLING (1-800-783-7546)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current Specification Sheet, go to [www.sterlingplumbing.com](http://www.sterlingplumbing.com).

1-13-2018 03:54



**Accord®**  
60" x 30" Bath with Backer Board  
**71141116**

No image available.  
This product is a component and not intended to be a standalone installation.

### Technical Information

All product dimensions are nominal.

Installation: 3-Wall Alcove

Drain location: Left

Minimum flat for door: 2-3/4" (70 mm)

Door width required: 56-3/4" (1441 mm)

### Notes

Install this product according to the installation instructions.

Product is designed to be used with a single-hole mixer valve with an escutcheon cover not to exceed 7-3/4" (197 mm) in width.

Bath cannot be installed without the wall surround.

Width of back wall at top transitions from 60" (1524 mm) at the front to 59-3/8" (1508 mm) in the back corners. Furring strips approximately 1/4" (6 mm) thick should be used at the back corner studs if drywall is to be installed over the nailing flange.