Carusoe® Close Coupled Toilet, 1.6GPF

FEATURES

- Powerful, quiet flushing system
- Close coupled commercial grade, high performance toilet
- Round front bowl and tank set, less seat
- Chrome trip lever
- 12" Rough-in, less supply

MODELS

- CST715
 Round bowl, 12" rough-in, less seat
- CST715B* Same as CST715 with bolt down lid (special order)
- CST715D*
 Same as CST715 with insulated tank (special order)
- CST715DB*
 Same as CST715 with bolt down lid & insulated tank (special order)

COMPONENTS

- C715
 Round bowl, 12" rough-in
- ST706
 Tank and Cover only
- ST706B Tank and Cover only, bolt down lid
- S1706D
 Tank and Cover only, insulated tank
- ST706DB Tank and Cover only, bolt down lid, insulated tank
- SS113 SoftClose® seat (sold separately)

COLORS/FINISHES

Standard
 #01 Cotton
 #03 Bone
 #11 Colonial White
 #12 Sedona Beige

PRODUCT SPECIFICATION

The two-piece gravity fed flushing system toilet shall be 1.6GPF/6.0LPF. Toilet shall have high-profile tank, round front bowl and chrome trip lever. Toilet shall be TOTO Model CST715_____.



CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others



Carusoe® Close Coupled Toilet, 1.6GPF

SPECIFICATIONS

Water Use
Flush System
Min. Water Pressure
Water Surface
Trap Diameter
Rough-in
1.6 GPF/6.0LPF
8 psi (static)
7-1/2" x 6-1/4"
2-1/8"
12"

Rough-in 12"Trap Seal 2"

Warranty
 One Year Limited Warranty

Material Vitreous china Shipping Weight C715 - 43.5lbs ST706 - 32.5lbs

Shipping Dimensions C715


26"L x 11-5/8"W1 x 15-3/8"W2 x 15"H


ST706 20"L x 8-1/4"W x 15-1/2"H

INSTALLATION NOTES

Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

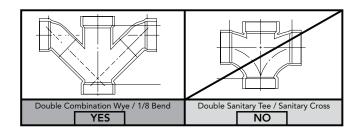

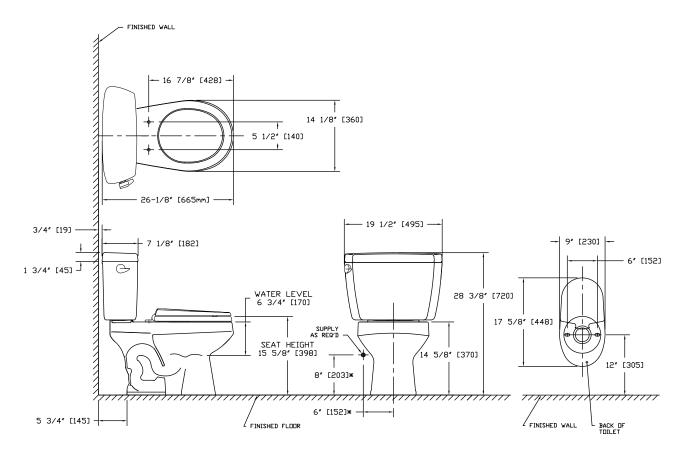

*SUGGESTED DIMENSIONS