Pacifica® Close Coupled Toilet, 1.6GPF

FEATURES

- G-Max® flushing system, low consumption (1.6GPF/6.0LPF)
- · Elongated front bowl and tank set, less seat
- Chrome trip lever
- 12" Unifit rough-in, less supply (included)

MODELS

CST804S

COMPONENTS

- CT804S Elongated bowl
- ST804S
 Tank and cover only
- SS114 SoftClose® seat (sold separately)
- SS204 SoftClose® seat (sold separately)
- TSU01W.10 10" Unifit rough-in (sold separately)
- TSU01W.14 14" Unifit rough-in (sold separately)

COLORS/FINISHES

Standard
#01 Cotton
#03 Bone
#11 Colonial White
#12 Sedona Beige
#51 Ebony

PRODUCT SPECIFICATION

The two-piece G-Max flushing system toilet shall be 1.6GPF/6.0LPF. Toilet shall have high-profile tank, elongated front bowl and chrome trip lever. Toilet shall be TOTO Model CST804S_____.





CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1
- Certifications: IAPMO(cUPC), State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others



Pacifica® Close Coupled Toilet, 1.6GPF/6.0 GPF

SPECIFICATIONS

Water Use

1.6 GPF/6.0LPF

Flush System G-Max®
Min. Water Pressure 8 psi (static)
Water Surface 10-1/4" x 8-1/2"

Trap Diameter 2-1/16"

• Rough-in 12" (10" and 14" available)

Trap Seal 2-5/8"

Warranty
 One Year Limited Warranty

Material Vitreous china Shipping Weight CT804S - 75.5lbs ST804S - 26.5lbs

Shipping Dimensions CT804S


30-1/8"L x 16-3/4"W x 22"H


ST804S 16-7/8"L x 9-1/4"W x 16-3/8"H

INSTALLATION NOTES

Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

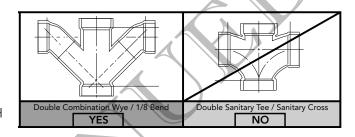

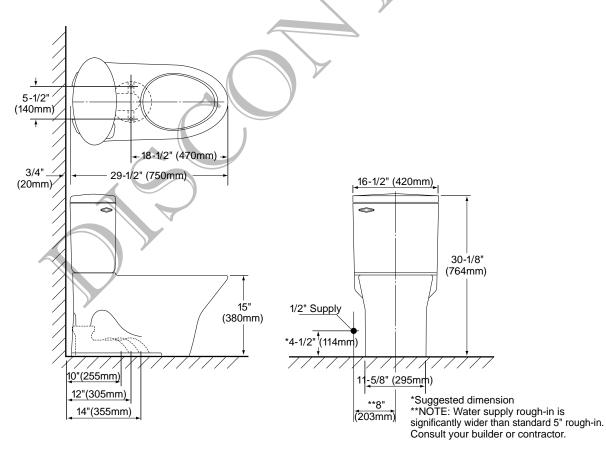

TOTO:

These dimensions and specifications are subject to change without notice