

MS854114EGEco UltraMax® One Piece Toilet, 1.28 GPF




MS854114EG - Eco UltraMax® Toilet with SoftClose® Seat



E-Max® Technology: Quiet, powerful, commercial grade flushing performance.



Complete with SoftClose® toilet Washlet®.



Fast Flush: New, wide 3" flush valve is 125% larger than seat, or upgrade to a conventional 2" flush valves.

- Sleek, high profile one piece design
- Wide, 2¹/₈" computer designed trapway
- E-Max® Technology
- Large water surface

High profile one piece toilet. Low consumption (1.28Gpf/4.8Lpf) siphon jet flushing action.

Tank cover, fittings, polished chrome trip lever, and SoftClose® seat included.

■ MS854114EG

Elongated toilet with SoftClose® seat. Sanagloss Ceramic Glaze.

Trip Lever: Standard #CP Chrome Plated



MS854114EG

Eco UltraMax® One Piece Toilet, 1.28 GPF

■ PERFORMANCE

The TOTO® E-Max® low consumption one piece toilet received high ratings during ANSI/ASME testing at independent laboratories. Designed with a powerful siphon jet flushing action, the bowl offers a large water surface and a 100% glazed trapway.

■ SPECIFICATIONS

Water Use: 1.28 Gpf/4.8Lpf Flush System: Gravity Feed

(E-Max® Technology)

Min. Water Pressure:

8 psi (Static)

Water Surface: 10" x 8"

Trap Dia.: 2-1/8"

Rough-in: 12"

Trap Seal: 2-3/8"

Warranty: Five Year Limited Warranty

Material: Vitreous China

Shipping Weight: MS854114EG 89 lbs.

(Includes SoftClose Seat)

Shipping Dimensions:

MS854114EG


29"L x 181/8"W x 271/4"H

Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2 and CAN/CSA B 45 requirements.

Listing / Approvals: IAPMO/c-UPC, CSA, City of Los Angeles, State of Massachusetts, and others.

WaterSense compliant.

These dimensions and specifications are subject to change without notice.

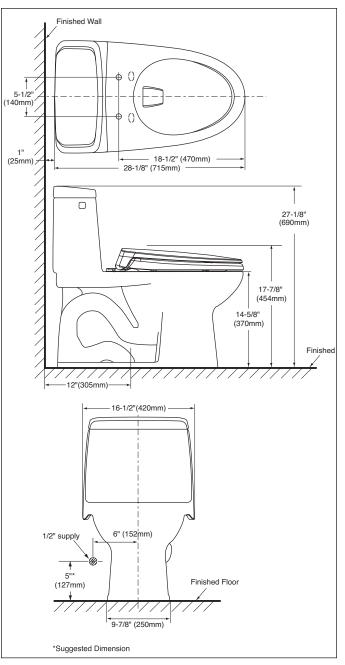

MS854114EG - Eco UltraMax® Toilet with SoftClose® Seat



TOTO® U.S.A., INC. • 1155 Southern Road, Morrow, GA 30260 Tel. (888) 295-8134 • Fax. (800) 699-4889 • www.totousa.com Printed in U.S.A. © TOTO U.S.A. 03/07 #A10372