

CST704LX 1.6 GPF Toilet, Elongated (ADA Compliant)



CST704L - 1.6 Gpf Toilet SS114 - SoftClose®Seat Toilet Seat

> #01 Cotton See price book for

additional colors

Chrome Plated

See price book

for additional finishes

Colors

Standard

Optional

Trip Lever: Standard

Optional

ST 706

ADA Compliant
Ultra-low 1.6 gallon flush
Powerful flushing design

Two piece vitreous china elongated front gravity feed 1.6 Gpf toilet, complete. Includes tank fittings and bolt caps, less seat. ADA compliant.

Tank fittings included, complete with chrome plated trip lever assembly.

CST704LX

Elongated front bowl, 12" rough-in.

🗆 C704L

Elongated front bowl only, 12" rough-in.

🗆 ST706

Tank and cover, complete with tank and trim coupling components.

□ ST706R (coming soon)

Tank and cover, complete with tank and trim coupling components with right hand trip lever.

🗆 SS114

SoftClose[®] Seat and lid gently close with a touch of a hand. Elongated, closed front seat with lid.

🗆 SC134

Elongated, open front seat with lid.

🗆 SC534

Elongated, open front seat less lid.



CST704LX 1.6 GPF Toilet, Elongated (ADA Compliant)

PERFORMANCE

The TOTO[®] 1.6 Gpf ADA toilet scored high ratings on ANSI/ASME testing at independent test laboratories. Designed for a powerful and quiet flush, the toilet also offers a large water surface.

SPECIFICATIONS

Water Use:	1.6 Gpf		
Flush System:	Gravity Feed		
Min. Water Pressure:	8 psi		
Water Surface:	9-1/2" x 8"		
Trap Diameter:	1-7/8"		
Rough-in:	12" rough-in		
Trap Seal:	2-1/8"		
Warranty:	One Year Limited Warranty		
Material:	Vitreous china bowl and tank		
Shipping Weight:	C704L–Bowl	53.5 lbs.	
	ST706–Tank	32.5 lbs.	

Shipping Dimensions: C704L–Bowl

28-3/4"L x 10"W x 18-7/8"H

ST706–Tank 20-1/8"L x 8-1/4"W x 15-1/2"H


Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2 and CAN/CSA B 45 requirements.

Listing / Approvals: IAPMO/c-UPC, CSA, City of Los Angeles, State of Massachusetts, and others.

Ŀ

Meets the American Disabilities Act Guidelines and ANSI A117.1 requirements where installed so top of seat is 17" from the finished floor. Recommended seat for ADA requirements: TOTO[®] model #SC514.

These dimensions and specifications are subject to change without notice.

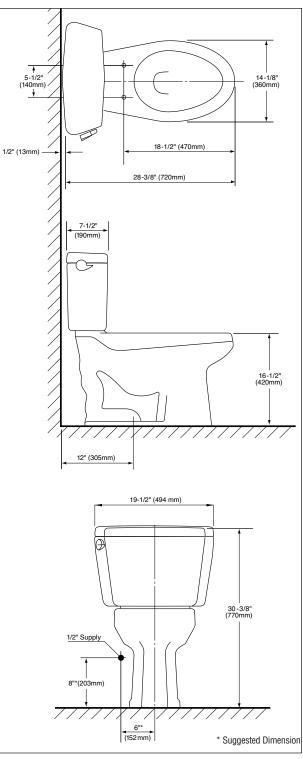





TOTO[®] U.S.A., INC. • 1155 Southern Road, Morrow, GA 30260 Tel. (770) 282-8686 • Fax. (770) 282-8701 • www.totousa.com Printed in U.S.A. © TOTO* LTD. 06/05 #E50030

Printed on recycled paper S REV 06/07