Non-Hold Open Urinal Flushometer Valve - 1.0 gpf

FEATURES

- Manual operated, non-hold open, urinal flushometer valve complete with 3/4″ angle stop and 3/4″ or 1-1/4"vacuum breaker set
- Piston valve action with 1.0 gpf
- Left/right rough-in

MODELS

☐ TMU1NNC
Valve only, Right/Left Hand Rough

☐ TMU1NNC-12 (3/4" Vacuum breaker)
Right/Left Hand Rough
Complete set supplied with:
Vacuum breaker & angle stop set – VB9CP-12
- 3/4″ Angle stop – 10077t4
- 3/4″ Vacuum breaker – 10075t2
- Spud nut & escutcheon – 71051Nt5
- Sweat solder kit – TH559EDVSJ1

☐ TMU1NNC-22 (1-1/4" Vacuum breaker)
Right/Left Hand Rough
Complete set supplied with:
Vacuum breaker & angle stop set – VB9CP-22
- 3/4″ Angle stop – 10077t4
- 1-1/4″ Vacuum breaker – 10075t5
- Spud nut & escutcheon – 71051Nt7
- Sweat solder kit – TH559EDVSJ1

☐ Optional Part:
Z-4000-J - Adapter for ground joint angle stops

COLORS/FINISHES

- #CP Polished Chrome

CODES/STANDARDS

- Meets or exceeds ASSE 1037, CSA B125.3
- Certifications: IAPMO(cUPC), ASSE, State of Massachusetts, City of Los Angeles, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- ADA compliant

PRODUCT SPECIFICATION

TOTO® Model No. _____
Manual type urinal flushometer valve, non-hold-open piston type with, self-cleaning debris screen and precise flushing capability. Low consumption 1.0 lpf/3.8 lpf model. Accessories to include angle stop with check valve, vacuum breaker. Sweat solder kit, spud nut and escutcheon.
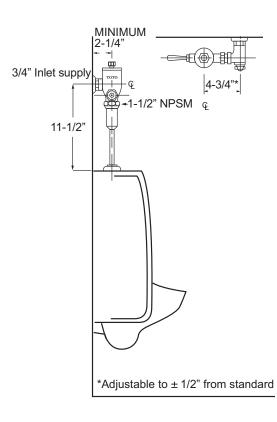
TMU1NNC Series

Non-Hold Open Urinal Flushometer Valve - 1.0 gpf

SPECIFICATIONS

- Warranty — Three Year Warranty
- Material — Bronze casting with polished chrome finish
- Water Supply — 3/4" NPT
- Fixture type — Low consumption urinal 1.0 gpf / 3.8 lpf flushometer type
- Supply water pressure — 15 psi - 100 psi*

These specifications are subject to change without notice.
*Water pressures over 80 psi are not recommended for most plumbing fixtures.
Check your local plumbing code for details.

MINIMUM
2-1/4"

3/4" Inlet supply

TOTO

4-3/4"*

1-1/2" NPSM

11-1/2"

*Adjustable to ± 1/2" from standard

TOTO®

These dimensions and specifications are subject to change without notice