



UT447



UT447V

- Low consumption one gallon or less per flush
- Compact design with privacy shields
- 14" elongated rim for all handicap applications
- Washout flush action

Vitreous china low consumption washout urinal. Includes wall hangers, 3/4" inlet spud, 2" I.P.S. outlet flange and rubber gasket. ADA Compliant.

■ **UT447**

Low consumption washout urinal
Top Spud Inlet

■ **UT447V**

Low consumption washout urinal
Back Spud Inlet

Colors:

Standard #01 Cotton

Optional See price book for additional colors

Recommended flushometer valve:

TOTO Manual and Electronic Flush Valves are highly recommended for maximum performance.



UT447

Low Consumption Washout Urinal

■ SPECIFICATIONS

Water Use: 0.5 – 1.0 Gpf
 Flush System: Washout flush action
 Warranty: One Year Limited Warranty
 Material: Vitreous china
 Height (Urinal Only) 27"
 Width 17½"
 Rim 14"
 Shipping Weight: **UT447 / UT447V**
 66 lbs.

Shipping Dimensions: **UT447 / UT447V**
 29⅞" L x 16¾" W¹
 x 19⅛" H

Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2M and CAN/CSA B 45 requirements.

Listing / Approvals: IAPMO/UPC, CSA, City of Los Angeles, State of Massachusetts, and others.




Meets the American Disabilities Act Guidelines and ANSI A117.1 requirements where installed so top of rim is 17" maximum from the finished floor.


Note: Refer to manufacturer's instructions and local codes for proper flushometer valve installation and requirements

Recommended carrier:
 Jay R. Smith 0636 (Wall Hanger)
 0637 (Wall Hanger with bottom)

These dimensions and specifications are subject to change without notice.

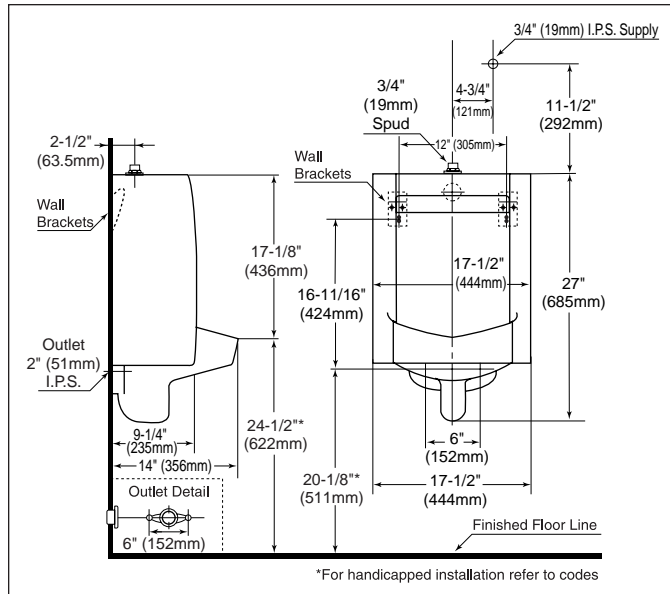

UT447

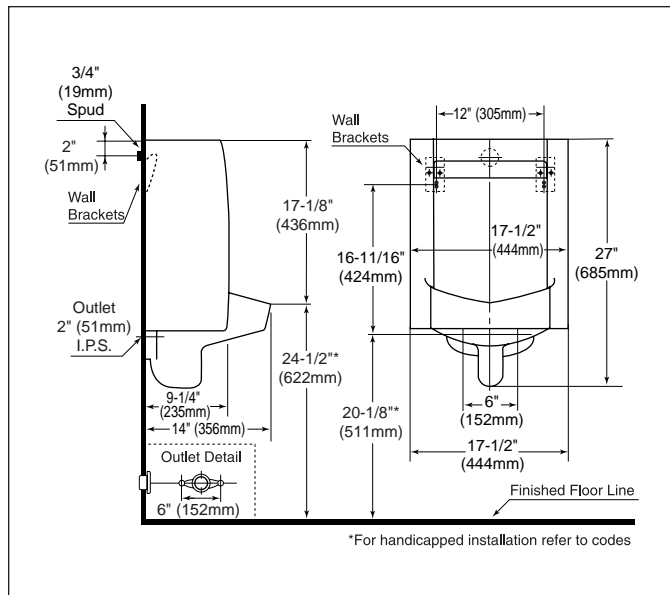

UT447V