

FEATURES

- Close coupled 2-pc. HET toilet. Combination elongated front bowl and tank, less seat.
- 12" (305mm) rough-in.
- Vitreous china.
- High efficiency (1.0 gpf/3.8 Lpf).
- Gravity feed, siphon action bowl.
- 2" fully-glazed trapway.
- Wide 3" flush valve.
- 18" ADA compliant bowl height.
- Color-matched trip lever.
- 2 color-matched bolt caps.
- 5 Year Limited Residential Warranty / 1 Year Commercial Warranty
- Meets strict flushing performance criterion established by the EPA (environmental protection Agency) WaterSense program
- High efficiency toilets use at least 20% less water than standard 1.6 GPF toilets
- This product can help a building earn Water Efficiency points in the LEED Greep Building Rating System™



TOILETS/LAVS

COLORS

- White
- Biscuit

Specified Model

	MODEL NO.	DESCRIPTION	Length	Width	Height
COMPLETE TOILET KITS					
<input type="checkbox"/>	TBT-1570	EL ADA Bowl & LH Tank	28 ¹ / ₈ "	18 ¹ / ₈ "	33 ¹ / ₂ "
INDIVIDUAL COMPONENTS					
<input type="checkbox"/>	TB-1570	Elongated Front ADA Bowl	28 ¹ / ₈ "	14"	18 ¹ / ₁₀ "
<input type="checkbox"/>	TT-1560	Toilet Tank - LH Trip Lever	8 ¹ / ₂ "	18 ¹ / ₈ "	15 ¹ / ₁₀ "

To Be Specified: Color (see below)


<input type="checkbox"/>	01 White
<input type="checkbox"/>	08 Biscuit

Compliance Certifications - Meets or Exceeds the Following Specifications

- ASME A112.19.2M-2008/CSA B45.1-2008
- UPC®, National Plumbing Code of Canada, IPC & IRC
- EPA Water Sense Tank-Type High Efficient Toilet Specs



When installed with seat, top of seat is 17" to 19" (432 to 483 mm) from finished floor. Meets the Americans with Disabilities Act guidelines and ANSI A117.1 requirements for accessible and usable building facilities-check local codes.

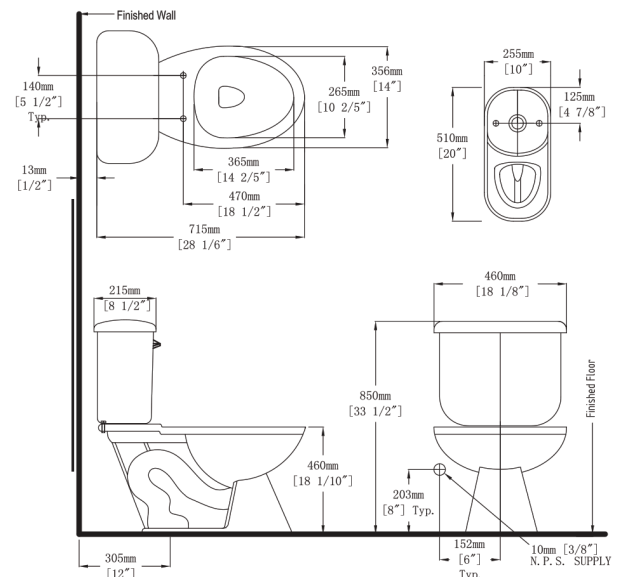

This toilet is designed to rough-in at a minimum dimension of 305mm (12") from finished wall to C/L of outlet. Supply not included with fixture and must be ordered separately.

Dimension shown for location of supply is suggested. For additional information refer to installation instructions supplied.