
SUBMITTAL DATA SHEET

Brass Low Pressure Gas Valve - Plug Style - Gas Only Lever Handle with Check - 10598

Inlet: FNPT Thread, Outlet: FNPT Thread




Brass body and plug manually operated low pressure natural or propane gas valve for use indoors on house piping system between the meter oulet and the inlet connection of the gas appliance at ambient temperatures of 32 to 125 degrees Fahrenheit.

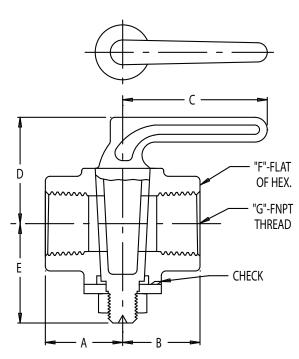

1/2" & 3/4" bottom check **Dimensions**

Size	Α	В	С	D	Е	F	G
1/2"	1.00	1.00	1.87	1.38	1.36	1.06	1/2
3/4"	1.16	1.16	2.19	1.53	1.39	1.28	3/4



Size	Α	В	С	D	Е	F	G
1/4"	.93	.93	2.62	1.69	1.19	.94	1/4
3/8"	.93	.93	2.62	1.69	1.19	.94	3/8
1"	1.38	1.38	2.75	1.82	1.56	1.59	1
1 1/4"	1.61	1.61	3.12	2.07	1.97	2.19	1 1/4
1 1/2"	1.70	1.70	3.50	2.41	2.09	2.25	1 1/2

SUBMITTAL INFORMATION

- Sizes: 1/4", 3/8", 1/2", 3/4", 1", 1 1/4", 1 1/2", 2"
- 2 PSIG
- NOTE: 1/2" and 3/4" valves are pressure rated at 5 PSIG
- NOTE: All A.Y. McDonald plug style gas valves are factory set. DO NOT TAMPER WITH BOTTOM NUT.



2.38

WARNING: It is unlawful in CALIFORNIA & VERMONT (effective 1/1/2010); MARYLAND (effective 1/1/2012); LOUISIANA (effective 1/1/2013) and the UNITED STATES OF AMERICA (effective 1/4/2014) to use THIS PRODUCT in the installation or repair of any public water system or any plumbing in a facility or system that provides water for human consumption. The wetted surface area of THIS PRODUCT has a weighted average lead content greater than 0.25%.



A.Y. McDonald Mfg. Co.

P.O. Box 508

Dubuque, IA 52004-0508

Toll Free: 1-800-292-2737 Fax: 1-800-832-9296

Hours: 7:00 a.m. - 5:00 p.m., CST

sales@aymcdonald.com www.aymcdonald.com

A.Y. McDonald considers the information on this assembly drawing correct when published. Item and option availability, including specifications, are subject to change without notice.

Submitted by: 3-14