


200 CWP • Threaded Bonnet • PTFE Disc • Solder Ends

Globe Valve Figure B-14T

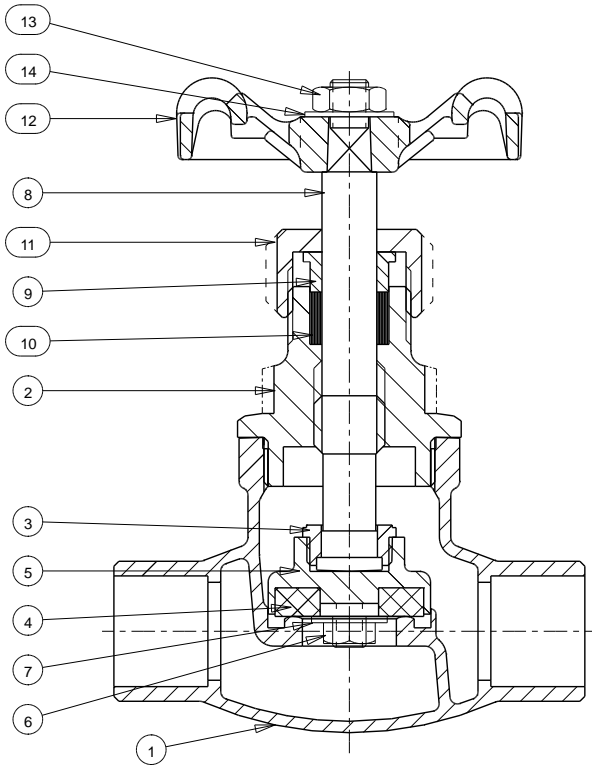

Materials of Construction

No.	Description	Material	ASTM Spec.
1	Body	Bronze	B-62 C83600
2	Bonnet	Bronze	B-62 C83600
3	Disc Stem Ring	Copper Silicon Bronze	B-371 C69400
4	Disc	PTFE (25% Glass Filled)	
5	Disc Holder	Bronze	B-62 C83600
6	Disc Retaining Nut	Brass	BSEN12164 CW614N
7	Washer	Brass	BSEN12164 CW614N
8	Stem	Copper Silicon Steel	B-371 C69400
9	Gland	Brass	BSEN12164 CW614N
10	Packing	Graphite (Asbestos Free)	
11	Packing Nut	Brass	BSEN12164 CW614N
12	Handwheel	Malleable Iron	A-197 F22000
13	Handwheel Nut	Brass	BSEN12164 CW614N
14	ID Plate	Aluminum	

NOTE:

The addition of the letter "K" at the end of the figure number designates valves assembled & tested in the USA. Materials of Construction & Dimensions are the same.


Industry Standards

Complies with MSS SP-80 Type 2

See Page 6 for Pressure-Temperature Ratings

Dimensions and Weights

Inches (millimeters) - Pounds (kilograms)

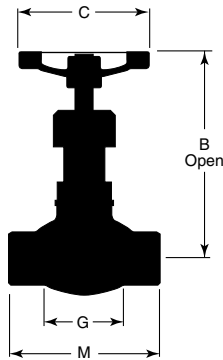

Valve Size	Dimensions				Wt.
	B	C	G	M	
3/8	3.94	2.05	1.56	2.32	1.90
	(100)	(52)	(40)	(59)	(0.39)
1/2	3.98	2.05	1.93	2.91	2.62
	(101)	(52)	(49)	(74)	(0.54)
3/4	4.53	2.05	2.24	3.74	3.15
	(115)	(52)	(57)	(95)	(0.65)
1	4.92	2.76	2.74	4.57	3.95
	(125)	(70)	(70)	(116)	(0.81)
1 1/4	5.91	2.76	2.99	4.92	7.54
	(150)	(70)	(76)	(125)	(1.55)
1 1/2	6.26	3.62	3.52	5.75	9.31
	(159)	(92)	(90)	(146)	(2.01)
2	7.52	4.06	4.40	7.09	14.97
	(191)	(103)	(112)	(180)	(3.08)