



ITALIAN COUNTRY BATH PRESSURE BALANCE TRIM WITH INTEGRATED VOLUME CONTROL AND DIVERTER

ROHL Country Bath Collection

A7400LM (Metal Lever)

A7400LP (Porcelain Lever)

A7400XM (Cross Handle)

A7400LC (Crystal Lever)

A7400XC (Crystal Cross Handle)

A7400LH (Hex Series Only Metal Lever)

FEATURES

- Pressure balanced concealed bath and shower mixer trim for R2014D rough valve with volume and temperature control
- Complete with plate, escutcheon, diverter, and handle
- Components made of brass
- Rotate handle clockwise for hot, counterclockwise for cold
- Move handle up for on, down for off

COLORS/FINISHES

- Polished Chrome
- Polished Nickel
- Satin Nickel
- Tuscan Brass
- Inca Brass
- Old Iron*
- *Old Iron finish only available for A7400LM and A7400XM


WARRANTY

- Limited Lifetime*
- *No warranty on Tuscan Brass finish

To complete package order R2014D rough valve





A7400LP and A7400LP






A7400XM






A7400LH





A7400LC





7 1/8"


A7400XC



INSTALLATION INSTRUCTIONS

Pressure Balance Trim with Integrated Volume Control Installation Instructions

For Model/s: ARB6400, ARB7400, AC600, AC700, A6400, A7400, U.6700, U.7700, U.6000, U.7000, A6200, A7200, BA600, & BA700

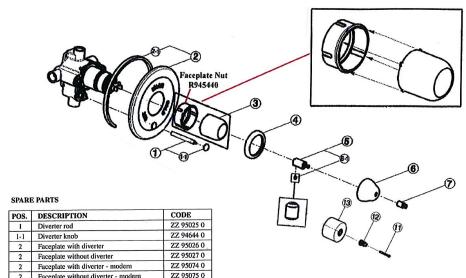

1-1	Diverter knob	ZZ 94644 0
2	Faceplate with diverter	ZZ 95026 0
2	Faceplate without diverter	ZZ 95027 0
2	Faceplate with diverter - modern	ZZ 95074 0
2	Faceplate without diverter - modern	ZZ 95075 0
2-1	Gasket for faceplate	ZZ 95028 0
3	Dome cap	ZZ 95029 0
4	Cover ring	ZZ 95030 0
5	Cartridge rod adaptor	ZZ 95031 0
5-1	Set screw M.5x6	ZZ 94063 0
6	Lever escutcheon	ZZ 95032 0
7	Lever extension	ZZ 92671 0
11	Screw M.3,5x30	ZZ 95078 0
12	Extension	ZZ 93497 0
13	Modern dome cap	ZZ 95077 0

Trim Parts Instructions:

- Mount Sealing Gasket (2-1) into Faceplate (2)
- Thread on Diverter Rod (1) if applicable
- Remove faceplate nut (R945440) from valve and install faceplate (2)
- Thread on faceplate nut (R945440)
 - Please note: faceplate nut is provided on the rough valve not with the trim
- Use Cover Sleeve (3) as a wrench to tighten the faceplate nut into place
- SlideTrim Ring (4) onto Cover Sleeve (3) to hide the edge of the Faceplate nut (R945440)

 Please note: O-ring on (4) is installed on the inner diameter of the Trim Ring (4)
- Install Cartridge Interface (5) onto stem of cartridge Use of 2.5 MM Allen key is needed
- Slip Trim cover (6) against cartridge interface (5)
- Install Handle Spacer (7) and tighten screw (5-1)
- Install lever or cross handle onto Handle Spacer (7)
 Use of 2.5 MM Allen key is needed
- Thread on Diverter button (1-1)
- Test. Adjust if necessary.
- 3/8" Extension Nut available; part # R945440/2
- Extended stem available; part # 30134

